



## TOP SELECTION GARDEN 2019 - CLASSIC RANGE



MADE IN ITALY

BISSO/ANNA  
for details see pag. 5



E22.131


## FILAMENT LED LAMP

- Perfect **matching with classic lanterns**: clear **LED filament lamp** with the look and the feeling of an incandescent bulb.
- **Suitable for outdoor use**: 100-240V built-in driver fully protected against heat and humidity by silicone paste.
- **Omnidirectional light**: 360° light output for a better lighting distribution.
- **High efficiency**: 90% energy saving.


<b>6w</b>	<b>8w</b>	<b>12w</b>		<b>2700 Kelvin</b>	<b>4000 Kelvin</b>
<b>800lm</b>	<b>1000lm</b>	<b>1500lm</b>		<b>SAPPHIRE LED SUPPORT EPISTAR CHIP</b> <b>90% HYDROGEN GAS</b>	
<b>100-240V</b>	<b>100-240V</b>	<b>100-240V</b>		<b>SILICONE PROTECTION DRIVER</b> <b>INDOOR &amp; OUTDOOR USE</b> <b>+80°C -30°C</b> <b>90% HUMIDITY</b> <b>VOLTAGE SURGE RESISTANT</b>	

[more details at page 60]







ANNA pg.04



SABA pg.08



GLOBE 250 pg.12




IESSE pg.52


GARDEN SMALL



RUT pg.16



SALEM pg.20




GOLIA pg.24



CEFA pg.28



GLOBE 300 pg.32



DARIA pg.52


GARDEN MEDIUM



NOEMI pg.36



SIOLE pg.40



TOBIA pg.44



SIMON pg.48

NEW VERSION  
HIGH POWER LED

GARDEN LARGE




SAURO 1100 pg.55



SAURO 800 pg.55



SAURO 500 pg.56



MIRELLA pg.56

BOLLARDS

# ANNA RANGE

SMALL SIZE



MADE IN ITALY

E22.110.F1R



E27 FILAMENT LED

**INDOOR & OUTDOOR USE**

+80°C  
-30°C

90%  
HUMIDITY

VOLTAGE SURGE RESISTANT

6W (800 lm)  
8W (1000 lm)  
12W (1500 lm)

More details at page 60



AVAILABLE COLORS

RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

ENERGY CLASS: A+, A, B, C, D, E

E27 LED FILAMENT VERSION

	<b>6W</b> <b>800 lm</b> 100-240V 50/60 Hz 4000K 2700K  <b>60W</b> INCANDESCENT
---	---


E27 VERSION




**BISSO/ANNA**



<b>6W</b> 4000K <b>2700K</b>	E22.131.F1L
	E22.131.F1R
<b>E27</b>	E22.131.E27




Master box: **18pcs**

MEDIUM LANTERN



**MIKROLOT/ANNA**


<b>6W</b> 4000K <b>2700K</b>	E22.110.F1L
	E22.110.F1R
<b>E27</b>	E22.110.E27

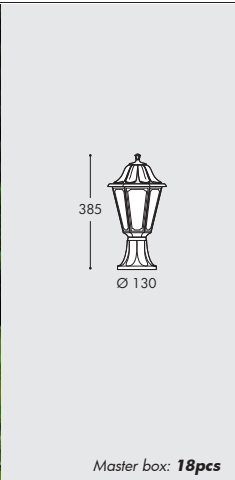

Master box: **18pcs**

**SICHEM/ANNA**

<b>6W</b> 4000K <b>2700K</b>	E22.120.F1L
	E22.120.F1R
<b>E27</b>	E22.120.E27

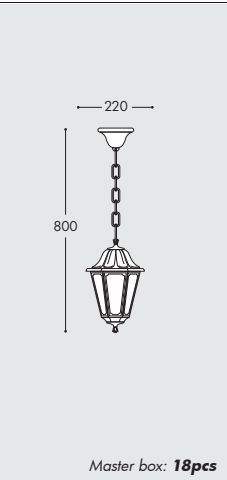

Master box: **18pcs**

LARGE LANTERN



HALF LANTERN



BOLLARD



**AVAILABLE COLORS**

RESIN BODY		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

**ENERGY CLASS**  
энергоэффективность

**A+**


**E27 LED FILAMENT VERSION**

<b>6W</b>
<b>800 lm</b>
100-240V
50/60 Hz
4000K   2700K
<b>60W</b> INCANDESCENT

### MIZAR/ANNA (resin)




<b>IP55</b> ◆ ▲ ▲	<b>6W</b> 4000K	E22.151.F1L
	2700K	E22.151.F1R




### ALOE' .R/ANNA (resin)




<b>IP55</b> ◆ ▲ ▲	<b>6W</b> 4000K	E22.163.F1L
	2700K	E22.163.F1R



### ARTU'ANNA

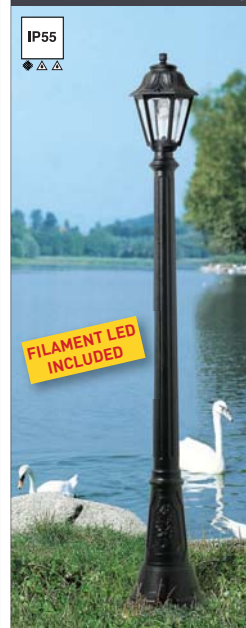

<b>IP55</b> ◆ ▲ ▲	<b>6W</b> 4000K	E22.158.F1L
	2700K	E22.158.F1R

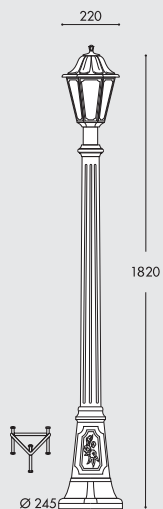

"METAL POST COVERED BY RESIN"

STEEL

RESIN

EXPANSE



ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZES

SMALL LANTERN




**GIGI BISSO/ANNA 2L**

6W 4000K E22.156.S20.F1L  
2700K E22.156.S20.F1R

IP55



FILAMENT LED INCLUDED

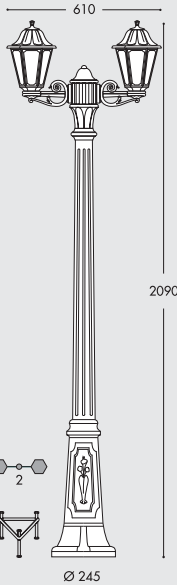


**GIGI BISSO/ANNA 3L**

6W 4000K E22.156.S30.F1L  
2700K E22.156.S30.F1R

IP55



FILAMENT LED INCLUDED

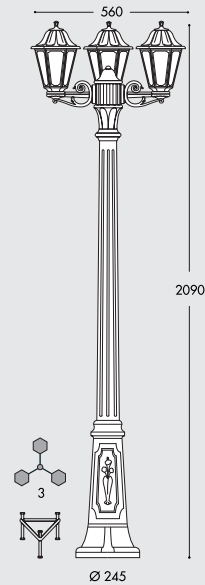

MEDIUM LANTERN



LARGE LANTERN



HALF LANTERN



BOLLARD



# SABA RANGE

SMALL SIZE



MADE IN ITALY



K22.131.F1R

E27 FILAMENT LED

**INDOOR &  
OUTDOOR  
USE**

+80°C  
-30°

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT

6W (800 lm)  
8W (1000 lm)  
12W (1500 lm)

More details at page 60





AVAILABLE COLORS

RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

ENERGY CLASSIFICATION: A+, A, B, C, D, E. **A+**

E27 LED FILAMENT VERSION

	<b>6W</b> <b>800 lm</b> 100-240V 50/60 Hz 4000K 2700K  <b>60W</b> INCANDESCENT
---	---

E27 VERSION




**BISSO/SABA**

IP55

<b>6W</b> 4000K <b>2700K</b>	K22.131.F1L K22.131.F1R
<b>E27</b>	K22.131.E27




275  
460  
275  
460

Master box: **18pcs**



**MIKROLOT/SABA**

<b>6W</b> 4000K <b>2700K</b>	K22.110.F1L K22.110.F1R
<b>E27</b>	K22.110.E27

IP55






400  
Ø 130

Master box: **18pcs**

**SICHEM/SABA**

<b>6W</b> 4000K <b>2700K</b>	K22.120.F1L K22.120.F1R
<b>E27</b>	K22.120.E27

IP55

220  
810


Master box: **18pcs**



**AVAILABLE COLORS**

RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

**ENERGY CLASS**  
энергокласс  
класс



A+ A A- B C D E

**E27 LED FILAMENT VERSION**




<b>6W</b>
<b>800 lm</b>
100-240V
50/60 Hz
4000K   2700K
 <b>60W</b> INCANDESCENT

### MIZAR/SABA (resin)




<b>6W</b>	4000K	K22.151.F1L
<b>2700K</b>		K22.151.F1R

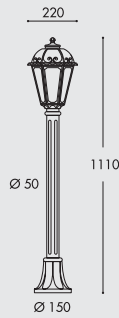

### ALOE'.R/SABA (resin)




<b>6W</b>	4000K	K22.163.F1L
<b>2700K</b>		K22.163.F1R

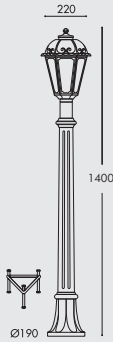

### ARTU'/SABA



<b>6W</b>	4000K	K22.158.F1L
<b>2700K</b>		K22.158.F1R

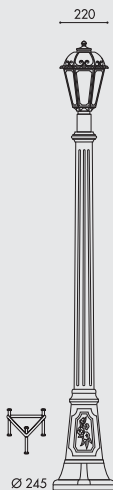

"METAL POST COVERED BY RESIN"

STEEL  
RESIN  
EXPANSE

ANTI RUST  
**LIFETIME GUARANTEE**  
NO PAINTING REQUIRED  
**MADE IN ITALY**

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZES



SMALL LANTERN




**GIGI BISSO/SABA 2L**

6W 4000K K22.156.S20.F1L  
2700K K22.156.S20.F1R

IP55

**FILAMENT LED INCLUDED**

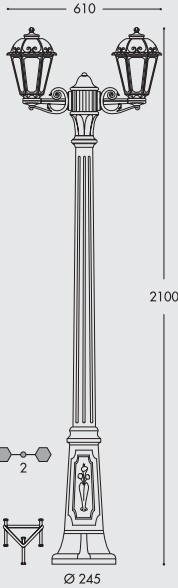


**GIGI BISSO/SABA 3L**

6W 4000K K22.156.S30.F1L  
2700K K22.156.S30.F1R

IP55

**FILAMENT LED INCLUDED**

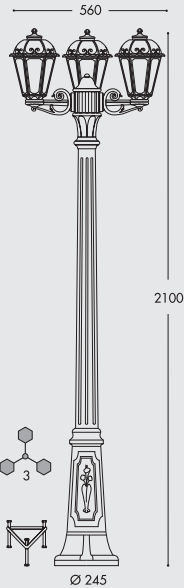

MEDIUM LANTERN



LARGE LANTERN



HALF LANTERN



BOLLARD



# GLOBE 250 RANGE

SMALL SIZE



MADE IN ITALY



E27 FILAMENT LED

**INDOOR & OUTDOOR USE**

+80°C  
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT



**6W (800 lm)**  
**8W (1000 lm)**  
**12W (1500 lm)**

More details at page 60



G25.131.F1R



**AVAILABLE COLORS**

RESIN BODY		DIFFUSER		
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)

**ENERGIA**  
енергия - энергия

**A+**

**E27 LED FILAMENT VERSION**

<b>6W</b>
<b>800 lm</b>
100-240V
50/60 Hz
4000K 2700K
<b>60W</b> INCANDESCENT


**E27 VERSION**



**BISSO/G250**



<b>6W</b>	4000K	G25.131.F1L
	<b>2700K</b>	G25.131.F1R
<b>E27</b>		G25.131.E27



Master box: **36pcs**



**MIKROLOT/G250**


<b>6W</b>	4000K	G25.110.F1L
	<b>2700K</b>	G25.110.F1R
<b>E27</b>		G25.110.E27



Master box: **36pcs**

**SICHEM/G250**

<b>6W</b>	4000K	G25.120.F1L
	<b>2700K</b>	G25.120.F1R
<b>E27</b>		G25.120.E27

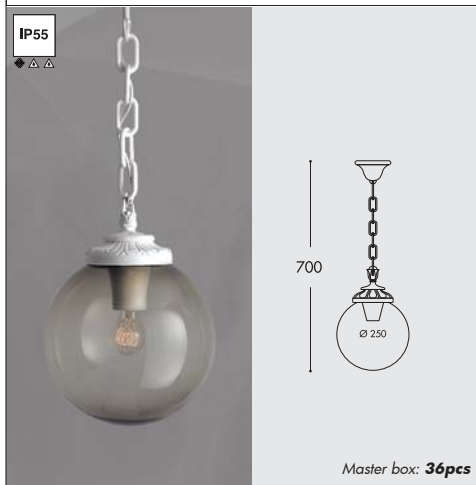

Master box: **36pcs**



**AVAILABLE COLORS**

RESIN BODY		DIFFUSER		
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)

**ENERGY CLASS**  
 энергия - энергия

**A+**


**E27 LED FILAMENT VERSION**

<b>6W</b>
<b>800 lm</b>
100-240V
50/60 Hz
4000K   2700K
<b>60W</b> INCANDESCENT

## MIZAR/G250 (resin)



<b>6W</b>	4000K	G25.151.F1L
<b>2700K</b>		G25.151.F1R




box: **2pcs**

## ALOE'.R/G250 (resin)



<b>6W</b>	4000K	G25.163.F1L
<b>2700K</b>		G25.163.F1R



box: **2pcs**

## ARTU'/G250



<b>6W</b>	4000K	G25.158.F1L
<b>2700K</b>		G25.158.F1R



box: **2pcs**

**"METAL POST COVERED BY RESIN"**

STEEL  
RESIN  
EXPANSE

ANTI RUST  
**LIFETIME GUARANTEE**  
NO PAINTING REQUIRED

**MADE IN ITALY**

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZES




**GIGI BISSO/G250 2L**

6W 4000K G25.156.S20.F1L  
2700K G25.156.S20.F1R

IP55



**FILAMENT LED INCLUDED**

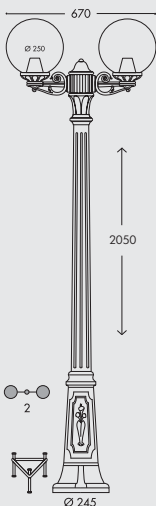

box: **2pcs**


**GIGI BISSO/G250 3L**

6W 4000K G25.156.S30.F1L  
2700K G25.156.S30.F1R

IP55



**FILAMENT LED INCLUDED**

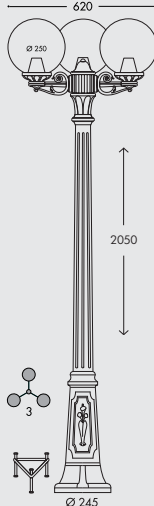

box: **2pcs**

**SMALL LANTERN**



**MEDIUM LANTERN**



**LARGE LANTERN**



**HALF LANTERN**



**BOLLARD**



# RUT RANGE

MEDIUM SIZE



MADE IN ITALY



E26.157.S30.M1R

E27 FILAMENT LED

**INDOOR & OUTDOOR USE**

+80°C  
-30°

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT

6W (800 lm)

8W (1000 lm)


12W (1500 lm)

More details at page 60





AVAILABLE COLORS

RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

ENERGY CLASS: A+ (energy saving - энергосберегающий)

E27 LED FILAMENT VERSION

	<b>8W</b> <b>1000 lm</b> 100-240V 50/60 Hz 4000K 2700K = 75W INCANDESCENT
---	--


E27 VERSION




**BISSO/RUT**



IP55	8W 4000K E26.131.M1L
	2700K E26.131.M1R
E27	E26.131.E27




Master box: 12pcs

MEDIUM LANTERN



**MINILOT/RUT**

8W 4000K	E26.111.M1L
	2700K E26.111.M1R
E27	E26.111.E27

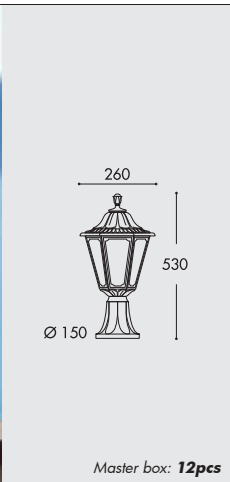

Master box: 12pcs

**SICHEM/RUT**

8W 4000K	E26.120.M1L
	2700K E26.120.M1R
E27	E26.120.E27



Master box: 12pcs

LARGE LANTERN



HALF LANTERN



BOLLARD



**AVAILABLE COLORS**

RESIN BODY		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

**ENERGY CLASS**  
сберэньва - энергия

A+


**E27 LED FILAMENT VERSION**

6W		8W	
800Lm		1000Lm	
100-240V		100-240V	
50/60 Hz		50/60 Hz	
4000K	2700K	4000K	2700K
60W INCANDESCENT		75W INCANDESCENT	

### MIZAR/RUT (resin)




6W	4000K	E26.151.F1L
	2700K	E26.151.F1R
8W	4000K	E26.151.M1L
	2700K	E26.151.M1R

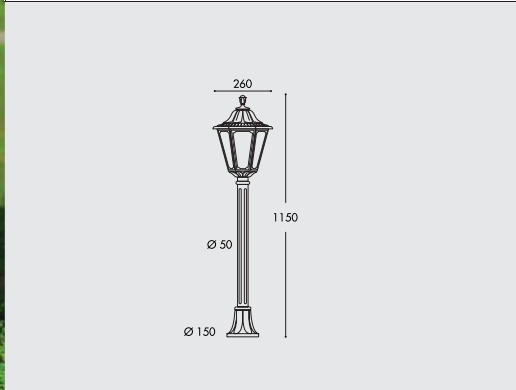

### RICU BISSO/RUT 2L




6W	4000K	E26.157.S20.F1L
	2700K	E26.157.S20.F1R
8W	4000K	E26.157.S20.M1L
	2700K	E26.157.S20.M1R

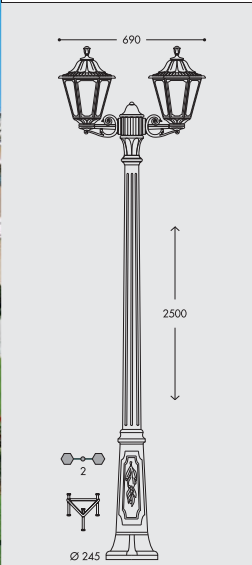


### RICU BISSO/RUT 3L



6W	4000K	E26.157.S30.F1L
	2700K	E26.157.S30.F1R
8W	4000K	E26.157.S30.M1L
	2700K	E26.157.S30.M1R

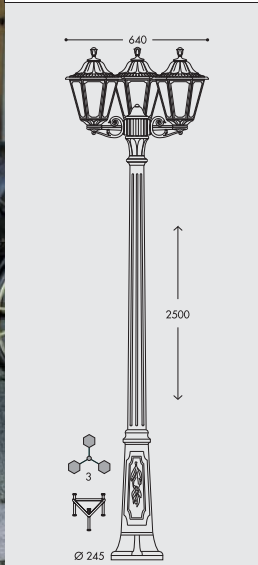


"METAL POST COVERED BY RESIN"



**ALOE' R/RUT (resin)**




6W	4000K	E26.163.F1L
	2700K	E26.163.F1R
8W	4000K	E26.163.M1L
	2700K	E26.163.M1R

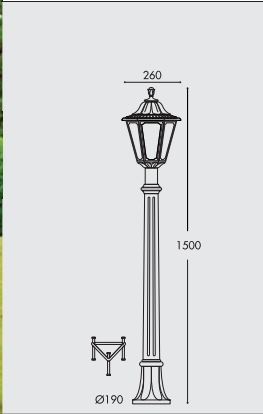

**ARTU' R/RUT**



6W	4000K	E26.158.F1L
	2700K	E26.158.F1R
8W	4000K	E26.158.M1L
	2700K	E26.158.M1R

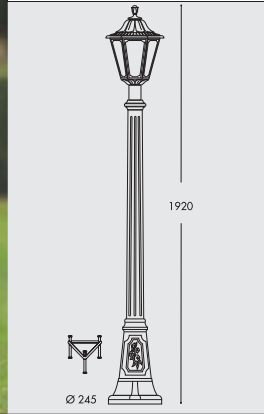


MEDIUM LANTERN



**GIGI/RUT**




6W	4000K	E26.156.F1L
	2700K	E26.156.F1R
8W	4000K	E26.156.M1L
	2700K	E26.156.M1R

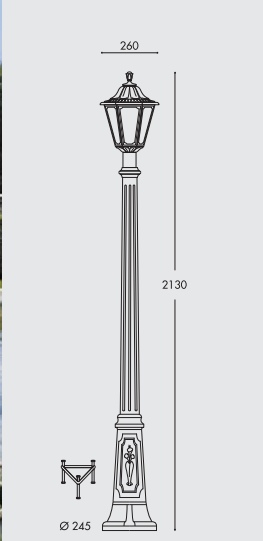

**RICU/RUT**



6W	4000K	E26.157.F1L
	2700K	E26.157.F1R
8W	4000K	E26.157.M1L
	2700K	E26.157.M1R

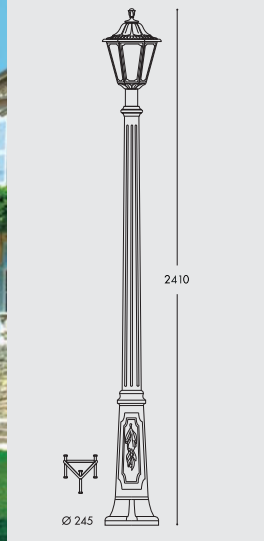

LARGE LANTERN



HALF LANTERN



BOLLARD



# SALEM RANGE

MEDIUM SIZE

MADE IN  
ITALY

K26.111.M1R



E27 FILAMENT LED

**INDOOR &  
OUTDOOR  
USE**

+80°C  
-30°

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT



**6W** (800 lm)


**8W** (1000 lm)

**12W** (1500 lm)

More details at page 60




AVAILABLE COLORS



BISSO/SALEM



IP55 ◆ ▲ ▲	8W	4000K 2700K	K26.131.M1L K26.131.M1R
	E27		K26.131.E27




Master box: 12pcs

MEDIUM LANTERN



MINILOT/SALEM


IP55 ◆ ▲ ▲	8W	4000K 2700K	K26.111.M1L K26.111.M1R
	E27		K26.111.E27



Master box: 12pcs

SICHEM/SALEM

IP55 ◆ ▲ ▲	8W	4000K 2700K	K26.120.M1L K26.120.M1R
	E27		K26.120.E27



Master box: 12pcs

LARGE LANTERN



HALF LANTERN



BOLLARD



**AVAILABLE COLORS**

RESIN BODY		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

**ENERGY CLASS**  
 ENERGY CLASS A+  
 A+ A A- B C D E


**E27 LED FILAMENT VERSION**

6W		8W	
800Lm		1000Lm	
100-240V		100-240V	
50/60 Hz		50/60 Hz	
4000K	2700K	4000K	2700K
	60W INCANDESCENT		75W INCANDESCENT

### MIZAR/SALEM (resin)




<b>6W</b>	4000K	K26.151.F1L
	2700K	K26.151.F1R
<b>8W</b>	4000K	K26.151.M1L
	2700K	K26.151.M1R

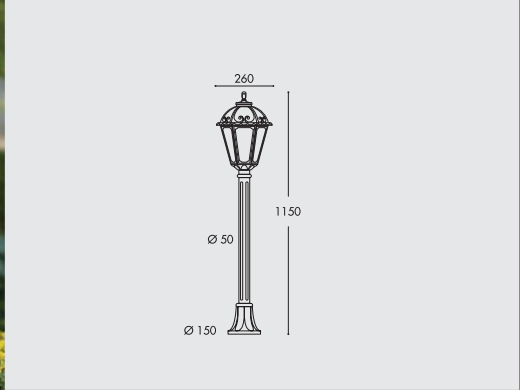

### RICU BISSO/SALEM 2L




<b>6W</b>	4000K	K26.157.S20.F1L
	2700K	K26.157.S20.F1R
<b>8W</b>	4000K	K26.157.S20.M1L
	2700K	K26.157.S20.M1R

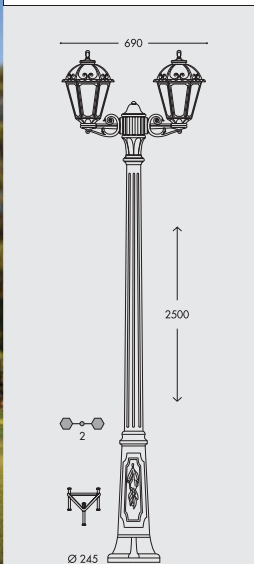

### RICU BISSO/SALEM 3L



<b>6W</b>	4000K	K26.157.S30.F1L
	2700K	K26.157.S30.F1R
<b>8W</b>	4000K	K26.157.S30.M1L
	2700K	K26.157.S30.M1R

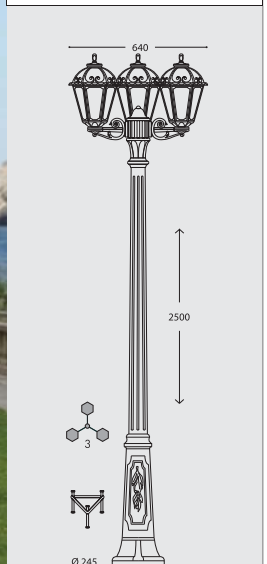

"METAL POST COVERED BY RESIN"

STEEL  
RESIN  
EXPANSE

ANTI RUST  
**LIFETIME GUARANTEE**  
NO PAINTING REQUIRED  
**MADE IN ITALY**

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZES



### ALOE'./SALEM (resin)

**IP55**

<b>6W</b>	4000K	K26.163.F1L
	<b>2700K</b>	K26.163.F1R
<b>8W</b>	4000K	K26.163.M1L
	<b>2700K</b>	K26.163.M1R

### ARTU'./SALEM

**IP55**

<b>6W</b>	4000K	K26.158.F1L
	<b>2700K</b>	K26.158.F1R
<b>8W</b>	4000K	K26.158.M1L
	<b>2700K</b>	K26.158.M1R

### GIGI./SALEM

**IP55**

<b>6W</b>	4000K	K26.156.F1L
	<b>2700K</b>	K26.156.F1R
<b>8W</b>	4000K	K26.156.M1L
	<b>2700K</b>	K26.156.M1R

### RICU./SALEM

**IP55**

<b>6W</b>	4000K	K26.157.F1L
	<b>2700K</b>	K26.157.F1R
<b>8W</b>	4000K	K26.157.M1L
	<b>2700K</b>	K26.157.M1R



# GOLIA RANGE

MEDIUM SIZE



MADE IN ITALY




Q23.131.M1R

E27 FILAMENT LED  
**INDOOR & OUTDOOR USE**  
+80°C  
-30°C  
90% HUMIDITY  
VOLTAGE SURGE RESISTANT  
6W (800 lm)  
8W (1000 lm)  
12W (1500 lm)  
More details at page 60





AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK (A)	CLEAR (X)
	
WHITE (W)	OPAL (Y)



E27 LED FILAMENT VERSION	
	<b>8W</b> <b>1000 lm</b> 100-240V 50/60 Hz 4000K 2700K = 75W INCANDESCENT




**BISSO/GOLIA**



IP55



<b>8W</b> 4000K Q23.131.M1L	<b>2700K</b> Q23.131.M1R
<b>E27</b>	Q23.131.E27



Master box: 12pcs

MEDIUM LANTERN




**MINILOT/GOLIA**

<b>8W</b> 4000K Q23.111.M1L	<b>2700K</b> Q23.111.M1R
<b>E27</b>	Q23.111.E27



IP55




Master box: 12pcs

**SICHEM/GOLIA**

<b>8W</b> 4000K Q23.120.M1L	<b>2700K</b> Q23.120.M1R
<b>E27</b>	Q23.120.E27



IP55



Master box: 12pcs

LARGE LANTERN



HALF LANTERN



BOLLARD



**AVAILABLE COLORS**

RESIN BODY		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

**ENERGY CLASS**  
сверхвысокий энергия

**A+**

**E27 LED FILAMENT VERSION**


6W		8W	
800Lm		1000Lm	
100-240V		100-240V	
50/60 Hz		50/60 Hz	
4000K	2700K	4000K	2700K
60W INCANDESCENT	75W INCANDESCENT		

### MIZAR/GOLIA (resin)



IP55

6W	4000K	Q23.151.F1L
	2700K	Q23.151.F1R
8W	4000K	Q23.151.M1L
	2700K	Q23.151.M1R




### RICU BISSO/GOLIA 2L



IP55

6W	4000K	Q23.157.S20.F1L
	2700K	Q23.157.S20.F1R
8W	4000K	Q23.157.S20.M1L
	2700K	Q23.157.S20.M1R

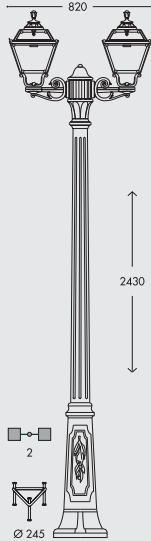


FILAMENT LED INCLUDED

### RICU BISSO/GOLIA 3L



IP55

6W	4000K	Q23.157.S30.F1L
	2700K	Q23.157.S30.F1R
8W	4000K	Q23.157.S30.M1L
	2700K	Q23.157.S30.M1R

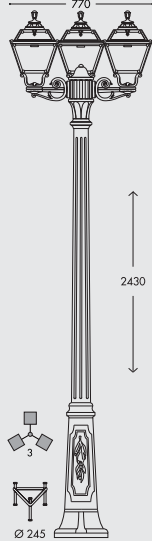

FILAMENT LED INCLUDED

"METAL POST COVERED BY RESIN"

STEEL  
RESIN  
EXPANSE

ANTI RUST  
**LIFETIME GUARANTEE**  
NO PAINTING REQUIRED  
**MADE IN ITALY**

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZES



### ALOE' R/GOLIA (resin)

**IP55**

<b>6W</b>	4000K	Q23.163.F1L
	2700K	Q23.163.F1R
<b>8W</b>	4000K	Q23.163.M1L
	2700K	Q23.163.M1R

**FILAMENT LED INCLUDED**

### ARTU' /GOLIA

**IP55**

<b>6W</b>	4000K	Q23.158.F1L
	2700K	Q23.158.F1R
<b>8W</b>	4000K	Q23.158.M1L
	2700K	Q23.158.M1R

**FILAMENT LED INCLUDED**

### GIGI/GOLIA

**IP55**

<b>6W</b>	4000K	Q23.156.F1L
	2700K	Q23.156.F1R
<b>8W</b>	4000K	Q23.156.M1L
	2700K	Q23.156.M1R

**FILAMENT LED INCLUDED**

### RICU/GOLIA

**IP55**

<b>6W</b>	4000K	Q23.157.F1L
	2700K	Q23.157.F1R
<b>8W</b>	4000K	Q23.157.M1L
	2700K	Q23.157.M1R

**FILAMENT LED INCLUDED**

SMALL LANTERN



MEDIUM LANTERN



LARGE LANTERN



HALF LANTERN



BOLLARD



MADE IN  
ITALY

U23.120.M1R

E27 FILAMENT LED

**INDOOR &  
OUTDOOR  
USE**

**+80°C**  
-30°C

**90%**  
HUMIDITY

**VOLTAGE SURGE  
RESISTANT**



**6W** (800 lm)  
**8W** (1000 lm)  
**12W** (1500 lm)

More details at page 60



**AVAILABLE COLORS**


RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

**ENERGY CLASS**  
энергия - энергия



**A+**

**E27 LED FILAMENT VERSION**

	<b>8W</b> <b>1000 lm</b> 100-240V 50/60 Hz 4000K 2700K =  <b>75W</b> INCANDESCENT
---	--

**E27 VERSION**




**BISSO/CEFA**



<b>IP55</b> ◆ ▲ ▲	<b>8W</b> 4000K U23.131.M1L 2700K U23.131.M1R
	<b>E27</b> U23.131.E27




Master box: **12pcs**

MEDIUM LANTERN



**MINILOT/CEFA**


<b>8W</b> 4000K U23.111.M1L 2700K U23.111.M1R
<b>E27</b> U23.111.E27



Master box: **12pcs**

**SICHEM/CEFA**

<b>8W</b> 4000K U23.120.M1L 2700K U23.120.M1R
<b>E27</b> U23.120.E27



Master box: **12pcs**

LARGE LANTERN



HALF LANTERN



BOLLARD



**AVAILABLE COLORS**

RESIN BODY		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

**ENERGY CLASS**  
сберэгіва - энергія

**A+**


**E27 LED FILAMENT VERSION**

6W		8W	
800Lm		1000Lm	
100-240V 50/60 Hz		100-240V 50/60 Hz	
4000K	2700K	4000K	2700K
=  60W INCANDESCENT		=  75W INCANDESCENT	

### MIZAR/CEFA (resin)




<b>6W</b>	4000K	U23.151.F1L
	2700K	U23.151.F1R
<b>8W</b>	4000K	U23.151.M1L
	2700K	U23.151.M1R



### RICU BISSO/CEFA 2L




<b>6W</b>	4000K	U23.157.S20.F1L
	2700K	U23.157.S20.F1R
<b>8W</b>	4000K	U23.157.S20.M1L
	2700K	U23.157.S20.M1R

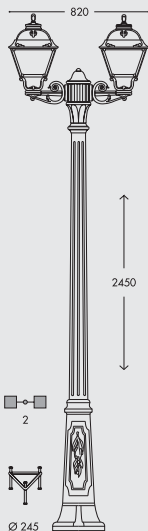

### RICU BISSO/CEFA 3L



<b>6W</b>	4000K	U23.157.S30.F1L
	2700K	U23.157.S30.F1R
<b>8W</b>	4000K	U23.157.S30.M1L
	2700K	U23.157.S30.M1R

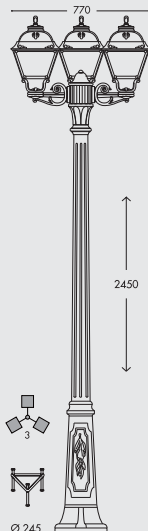

"METAL POST COVERED BY RESIN"

STEEL  
RESIN  
EXPANSE

ANTI RUST  
LIFETIME  
GUARANTEE  
NO PAINTING  
REQUIRED  
MADE IN  
ITALY

ANTI  
CORROSION

UV-RAYS  
STABILIZED

NO  
MAINTENANCE

DOUBLE  
INSULATION

NOT AFFECTED  
BY CHEMICAL  
FERTILIZES



### ALOE'R/CEFA (resin)

IP55

6W	4000K	U23.163.F1L
	2700K	U23.163.F1R
8W	4000K	U23.163.M1L
	2700K	U23.163.M1R

FILAMENT LED INCLUDED

### ARTU'/CEFA

IP55

6W	4000K	U23.158.F1L
	2700K	U23.158.F1R
8W	4000K	U23.158.M1L
	2700K	U23.158.M1R

FILAMENT LED INCLUDED

### GIGI/CEFA

IP55

6W	4000K	U23.156.F1L
	2700K	U23.156.F1R
8W	4000K	U23.156.M1L
	2700K	U23.156.M1R

FILAMENT LED INCLUDED

### RICU/CEFA

IP55

6W	4000K	U23.157.F1L
	2700K	U23.157.F1R
8W	4000K	U23.157.M1L
	2700K	U23.157.M1R

FILAMENT LED INCLUDED

SMALL  
LANTERN



MEDIUM  
LANTERN



LARGE  
LANTERN



HALF  
LANTERN



BOLLARD



# GLOBE 300 RANGE

MEDIUM SIZE

**fumagalli**  
since 1973

MADE IN  
ITALY

G30.111

E27 FILAMENT LED

**INDOOR &  
OUTDOOR  
USE**

+80°C  
-30°C

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT

6W (800 lm)  
8W (1000 lm)  
12W (1500 lm)

More details at page 60





G30.162





AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK (A)	WHITE (W)
	
CLEAR (X)	OPAL (Y)
	
	SMOKED (Z)




E27 LED FILAMENT VERSION	
	8W 1000 lm 100-240V 50/60 Hz 4000K 2700K = 75W INCANDESCENT



**BISSO/G300**



8W	4000K	G30.131.M1L
	2700K	G30.131.M1R
E27		G30.131.E27



Master box: 24pcs

**MEDIUM LANTERN**



**MINILOT/G300**

8W	4000K	G30.111.M1L
	2700K	G30.111.M1R
E27		G30.111.E27



Master box: 24pcs

**SICHEM/G300**

8W	4000K	G30.120.M1L
	2700K	G30.120.M1R
E27		G30.120.E27



Master box: 24pcs

**LARGE LANTERN**



**HALF LANTERN**



**BOLLARD**



**AVAILABLE COLORS**

RESIN BODY		DIFFUSER		
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)


**ENERGIA** EUROPEAN ENERGY EFFICIENCY CLASSIFICATION  
энергия - европейская классификация

**A+**


**E27 LED FILAMENT VERSION**

6W		8W	
800Lm		1000Lm	
100-240V		100-240V	
50/60 Hz		50/60 Hz	
4000K	2700K	4000K	2700K
=  60W INCANDESCENT		=  75W INCANDESCENT	

## IAFET.R/G300 (resin)

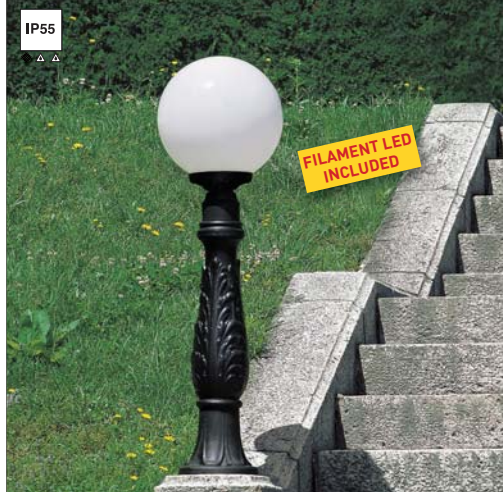


<b>6W</b>	4000K	G30.162.F1L
	2700K	G30.162.F1R
<b>8W</b>	4000K	G30.162.M1L
	2700K	G30.162.M1R

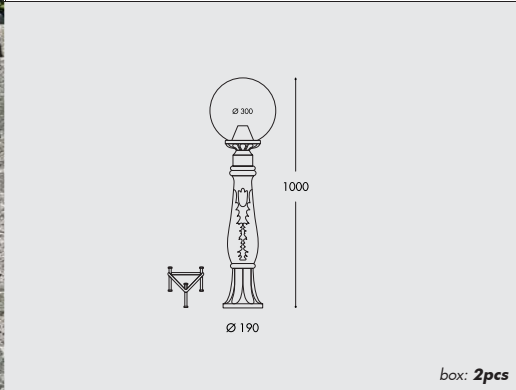


## RICU BISSO/G300 2L




<b>6W</b>	4000K	G30.157.S20.F1L
	2700K	G30.157.S20.F1R
<b>8W</b>	4000K	G30.157.S20.M1L
	2700K	G30.157.S20.M1R

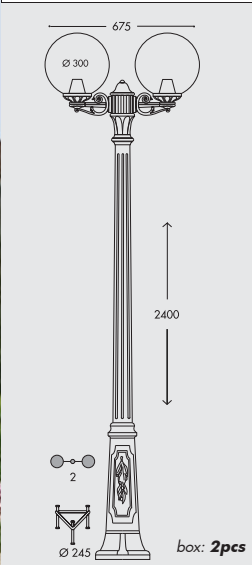

## RICU BISSO/G300 3L

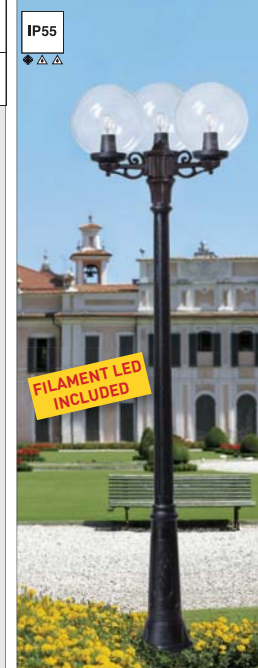

<b>6W</b>	4000K	G30.157.S30.F1L
	2700K	G30.157.S30.F1R
<b>8W</b>	4000K	G30.157.S30.M1L
	2700K	G30.157.S30.M1R

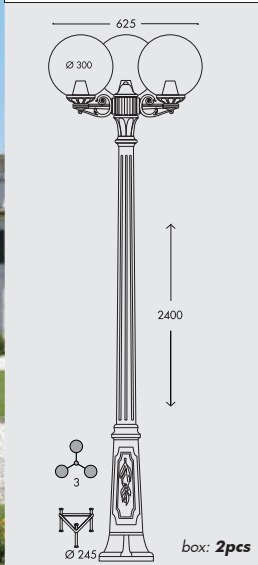

**"METAL POST COVERED BY RESIN"**

STEEL  
RESIN  
EXPANSE

ANTI RUST  
**LIFETIME GUARANTEE**  
NO PAINTING REQUIRED  
**MADE IN ITALY**

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZES




**SMALL LANTERN**



**ALOE' R/G300 (resin)**

IP55

6W	4000K	G30.163.F1L
	2700K	G30.163.F1R
8W	4000K	G30.163.M1L
	2700K	G30.163.M1R



box: 2pcs

**ARTU' G300**

IP55

6W	4000K	G30.158.F1L
	2700K	G30.158.F1R
8W	4000K	G30.158.M1L
	2700K	G30.158.M1R



box: 2pcs


**MEDIUM LANTERN**



**GIGI/G300**

IP55

6W	4000K	G30.156.F1L
	2700K	G30.156.F1R
8W	4000K	G30.156.M1L
	2700K	G30.156.M1R

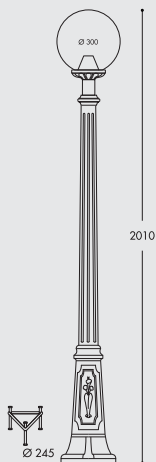


box: 2pcs

**RICU/G300**

IP55

6W	4000K	G30.157.F1L
	2700K	G30.157.F1R
8W	4000K	G30.157.M1L
	2700K	G30.157.M1R

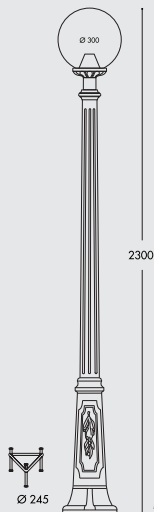

box: 2pcs

**LARGE LANTERN**



**HALF LANTERN**



**BOLLARD**



# NOEMI RANGE

LARGE SIZE

MADE IN  
ITALY



E27 HIGH POWER LED

INDOOR &  
OUTDOOR  
USE

+80°C  
-30°

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT

15W (1500 lm)

30W (3300 lm)

50W (5000 lm)

More details at page 62



NEW VERSION  
HIGH POWER  
LED

E35.132.Q1R



AVAILABLE COLORS

RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

ENERGY CLASSIFICATION: A+, A, B, C, D, E. **A+**

E27 HIGH POWER LED VERSION

15W <b>NEW</b>		30W	
1500 lm		3300 lm	
100-240V 50/60 Hz		100-240V 50/60 Hz	
4000K	3000K	4000K	3000K
= 100W INCANDESCENT		= NOEMI 70W HQI-SO <sub>4</sub>	




OFIR/NOEMI



<b>15W LED</b> 4000K	E35.132.R1L	<b>NEW</b>
<b>3000K</b>	E35.132.R1R	
<b>30W LED</b> 4000K	E35.132.Q1L	
<b>3000K</b>	E35.132.Q1R	

**NEW VERSION HIGH POWER LED**

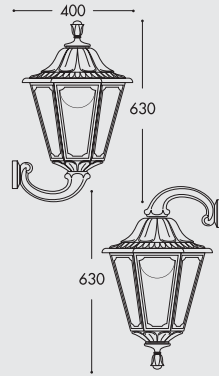

box: 1pcs

MEDIUM LANTERN




LOT/NOEMI

<b>15W LED</b> 4000K	E35.113.R1L	<b>NEW</b>
<b>3000K</b>	E35.113.R1R	
<b>30W LED</b> 4000K	E35.113.Q1L	
<b>3000K</b>	E35.113.Q1R	



**NEW VERSION HIGH POWER LED**




box: 1pcs

SICHEM/NOEMI

<b>15W LED</b> 4000K	E35.121.R1L	<b>NEW</b>
<b>3000K</b>	E35.121.R1R	
<b>30W LED</b> 4000K	E35.121.Q1L	
<b>3000K</b>	E35.121.Q1R	



**NEW VERSION HIGH POWER LED**



box: 1pcs

LARGE LANTERN





HALF LANTERN



BOLLARD





E27 HIGH POWER LED VERSION					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	COMPARISON
 E27 HIGH POWER LED Ø 100	<b>NEW</b> <b>15W</b>	1500Lm	100-240V 50/60 Hz	4000K	=  100W INCANDESCENT
	<b>30W</b>	3300Lm	100-240V 50/60 Hz	4000K 3000K	=  NOEMI H3I-SON 70W




### IAFET.R/NOEMI (resin)



IP55

<b>15W LED</b>	4000K <b>3000K</b>	E35.162.R1L E35.162.R1R	<b>NEW</b>
<b>30W LED</b>	4000K <b>3000K</b>	E35.162.Q1L E35.162.Q1R	



**NEW VERSION  
HIGH POWER LED**

box: **2pcs**




IP55


ARTU'/NOEMI		GIGI/NOEMI		RICU/NOEMI	
<b>NEW</b> <b>15W LED</b>	4000K <b>3000K</b>	E35.158.R1L E35.158.R1R	<b>15W LED</b>	4000K <b>3000K</b>	E35.156.R1L E35.156.R1R
<b>30W LED</b>	4000K <b>3000K</b>	E35.158.Q1L E35.158.Q1R	<b>30W LED</b>	4000K <b>3000K</b>	E35.156.Q1L E35.156.Q1R

**NEW VERSION  
HIGH POWER LED**


**NEW VERSION  
HIGH POWER LED**

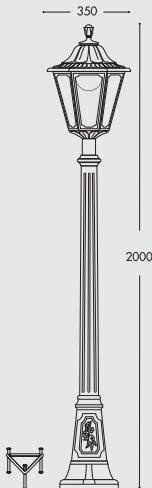

box: **2pcs**



box: **2pcs**

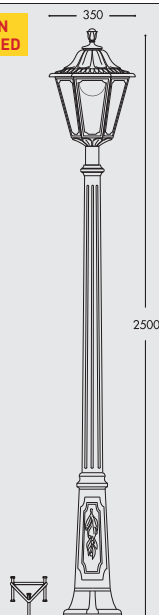

box: **2pcs**

"METAL POST COVERED BY RESIN"

STEEL

RESIN

EXPANSE

ANTI RUST  
**LIFETIME GUARANTEE**  
NO PAINTING REQUIRED

**MADE IN ITALY**

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZES




**NEBO/NOEMI**

**30W LED** 4000K E35.201.Q1L  
**3000K** E35.201.Q1R



IP55

**NEW VERSION HIGH POWER LED**



Ø 275


**NEBO OFIR/NOEMI 2L**

**30W LED** 4000K E35.201.R20.Q1L  
**3000K** E35.201.R20.Q1R



IP55

**NEW VERSION HIGH POWER LED**

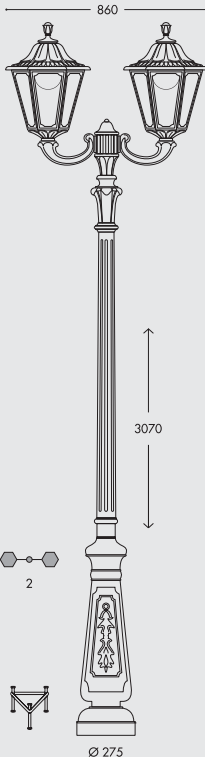

2

Ø 275

**SMALL LANTERN**



**MEDIUM LANTERN**



**LARGE LANTERN**



**HALF LANTERN**



**BOLLARD**



# SILOE RANGE

LARGE SIZE

MADE IN  
ITALY

NEW VERSION  
HIGH POWER  
LED



K35.132.Q1R

E27 HIGH POWER LED

INDOOR &  
OUTDOOR  
USE

+80°C  
-30°

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT



15W (1500 lm)  
30W (3300 lm)  
50W (5000 lm)



More details at page 62





**AVAILABLE COLORS**

RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

**ENERGY CLASS**  
A+ A A- B C D E


**A+**

**E27 HIGH POWER LED VERSION**

15W <b>NEW</b>		30W	
1500 lm		3300 lm	
100-240V 50/60 Hz		100-240V 50/60 Hz	
4000K	3000K	4000K	3000K
= 100W INCANDESCENT		= NOEMI 70W HQI-SON	



**OFIR/SILOE**

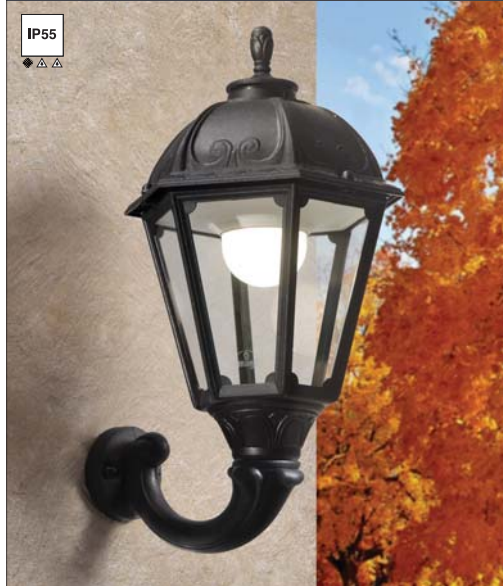

<b>15W LED</b> 4000K	K35.132.R1L	<b>NEW</b>
<b>3000K</b>	K35.132.R1R	
<b>30W LED</b> 4000K	K35.132.Q1L	<b>NEW VERSION HIGH POWER LED</b>
<b>3000K</b>	K35.132.Q1R	

box: **1pcs**

MEDIUM LANTERN



**LOT/SILOE**

<b>15W LED</b> 4000K	K35.113.R1L	<b>NEW</b>
<b>3000K</b>	K35.113.R1R	
<b>30W LED</b> 4000K	K35.113.Q1L	<b>NEW VERSION HIGH POWER LED</b>
<b>3000K</b>	K35.113.Q1R	

**IP55**  
◆ ▲ ▲

box: **1pcs**

**SICHEM/SILOE**

<b>15W LED</b> 4000K	K35.121.R1L	<b>NEW</b>
<b>3000K</b>	K35.121.R1R	
<b>30W LED</b> 4000K	K35.121.Q1L	<b>NEW VERSION HIGH POWER LED</b>
<b>3000K</b>	K35.121.Q1R	




**IP55**  
◆ ▲ ▲

box: **1pcs**

LARGE LANTERN





E27 HIGH POWER LED VERSION					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	COMPARISON
 E27 HIGH POWER LED Ø 100	<b>NEW</b> 15W	1500Lm	100-240V 50/60 Hz	4000K	=  100W INCANDESCENT =  SILOE 70W HQI-SON
	30W	3300Lm	100-240V 50/60 Hz	4000K 3000K	




### IAFET.R/SILOE (resin)



IP55



<b>15W LED</b> <b>30W LED</b>	4000K <b>3000K</b>	K35.162.R1L K35.162.R1R	<b>NEW</b>
	4000K <b>3000K</b>	K35.162.Q1L K35.162.Q1R	



**NEW VERSION HIGH POWER LED**


box: **2pcs**



IP55




ARTU'/SILOE	GIGI/SILOE	RICU/SILOE
<b>NEW</b> 15W 4000K K35.158.R1L LED <b>3000K</b> K35.158.R1R	15W 4000K K35.156.R1L LED <b>3000K</b> K35.156.R1R	15W 4000K K35.157.R1L LED <b>3000K</b> K35.157.R1R
30W 4000K K35.158.Q1L LED <b>3000K</b> K35.158.Q1R	30W 4000K K35.156.Q1L LED <b>3000K</b> K35.156.Q1R	30W 4000K K35.157.Q1L LED <b>3000K</b> K35.157.Q1R




**NEW VERSION HIGH POWER LED**

box: **2pcs**



**NEW VERSION HIGH POWER LED**

box: **2pcs**

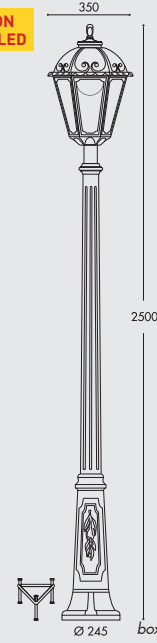

box: **2pcs**

"METAL POST COVERED BY RESIN"

STEEL

RESIN

EXPANSE

ANTI RUST  
**LIFETIME GUARANTEE**  
NO PAINTING REQUIRED

MADE IN ITALY

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZES



**NEBO/SILOE**

**30W LED** 4000K K35.201.Q1L  
**3000K** K35.201.Q1R



NEW VERSION  
HIGH POWER LED




Ø 275

IP55




**NEBO OFIR/SILOE 2L**

**30W LED** 4000K K35.201.R20.Q1L  
**3000K** K35.201.R20.Q1R

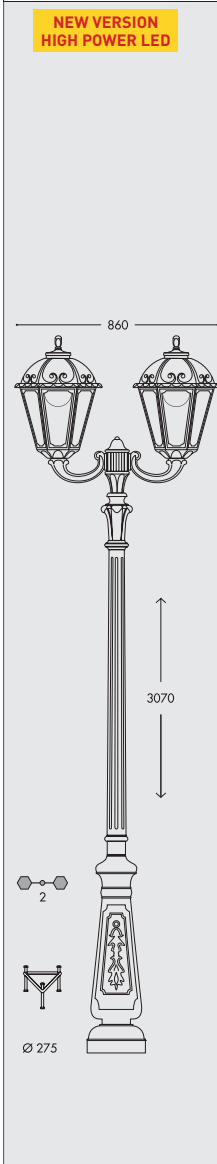

NEW VERSION  
HIGH POWER LED

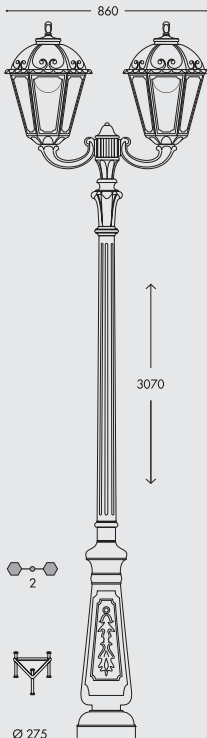

Ø 275



IP55



SMALL LANTERN



MEDIUM LANTERN



LARGE LANTERN



HALF LANTERN



BOLLARD



# TOBIA RANGE

LARGE SIZE

MADE IN  
ITALY

NEW VERSION  
HIGH POWER  
LED



E27 HIGH POWER LED

INDOOR &  
OUTDOOR  
USE

+80°C  
-30°C

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT

15W (1500 lm)  
30W (3300 lm)  
50W (5000 lm)

More details at page 62




Q33.113.Q1R



AVAILABLE COLORS

RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



E27 HIGH POWER LED VERSION


15W <b>NEW</b>		30W	
1500 lm		3300 lm	
100-240V 50/60 Hz		100-240V 50/60 Hz	
4000K	3000K	4000K	3000K
= 100W INCANDESCENT		= TOBIA 70W HQI-SON	



OFIR/TOBIA



15W LED 3000K	Q33.132.R1L	<b>NEW</b>
4000K	Q33.132.R1R	
30W LED 3000K	Q33.132.Q1L	
4000K	Q33.132.Q1R	

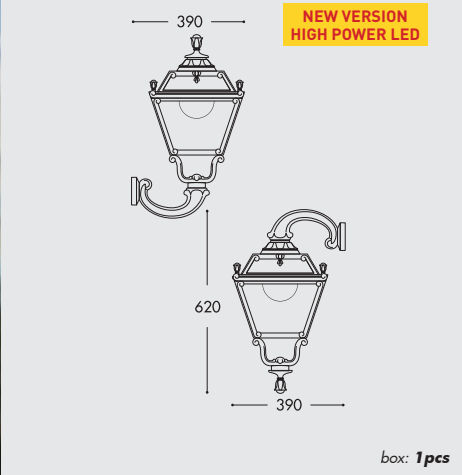


MEDIUM LANTERN



LOT/TOBIA

15W LED 3000K	Q33.113.R1L	<b>NEW</b>
4000K	Q33.113.R1R	
30W LED 3000K	Q33.113.Q1L	
4000K	Q33.113.Q1R	

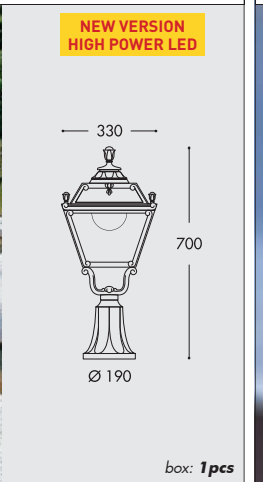

SICHEM/TOBIA

15W LED 3000K	Q33.121.R1L	<b>NEW</b>
4000K	Q33.121.R1R	
30W LED 3000K	Q33.121.Q1L	
4000K	Q33.121.Q1R	



LARGE LANTERN



HALF LANTERN



BOLLARD





E27 HIGH POWER LED VERSION					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	COMPARISON
 E27 HIGH POWER LED Ø 100	<b>15W</b> <i>NEW</i>	1500Lm	100-240V 50/60 Hz	4000K	≈  100W INCANDESCENT
	<b>30W</b>	3300Lm	100-240V 50/60 Hz	4000K 3000K	≈  TOBIA H31-SON 70W



### IAFET.R/TOBIA (resin)

IP55  
△ △

<b>15W LED</b> 4000K 3000K	4000K 3000K	Q33.162.R1L Q33.162.R1R	<i>NEW</i>
<b>30W LED</b> 4000K 3000K	4000K 3000K	Q33.162.Q1L Q33.162.Q1R	

1200  
Ø 190

**NEW VERSION HIGH POWER LED**

*box: 2pcs*

IP55  
◆ △ △

ARTU'/TOBIA	GIGI/TOBIA	RICU/TOBIA
<i>NEW</i> <b>15W LED</b> 4000K Q33.158.R1L 3000K Q33.158.R1R	<b>15W LED</b> 4000K Q33.156.R1L 3000K Q33.156.R1R	<b>15W LED</b> 4000K Q33.157.R1L 3000K Q33.157.R1R
<b>30W LED</b> 4000K Q33.158.Q1L 3000K Q33.158.Q1R	<b>30W LED</b> 4000K Q33.156.Q1L 3000K Q33.156.Q1R	<b>30W LED</b> 4000K Q33.157.Q1L 3000K Q33.157.Q1R

**NEW VERSION HIGH POWER LED**

330  
1960  
Ø 245

*box: 2pcs*

**NEW VERSION HIGH POWER LED**

330  
2240  
Ø 245

*box: 2pcs*

**NEW VERSION HIGH POWER LED**

330  
2500  
Ø 245

*box: 2pcs*

"METAL POST COVERED BY RESIN"

STEEL

RESIN

EXPANSE

ANTI RUST  
**LIFETIME GUARANTEE**  
NO PAINTING REQUIRED

**MADE IN ITALY**

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE


DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS



**NEBO/TOBIA**


<b>30W LED</b>	4000K	Q33.201.Q1L
<b>3000K</b>		Q33.201.Q1R

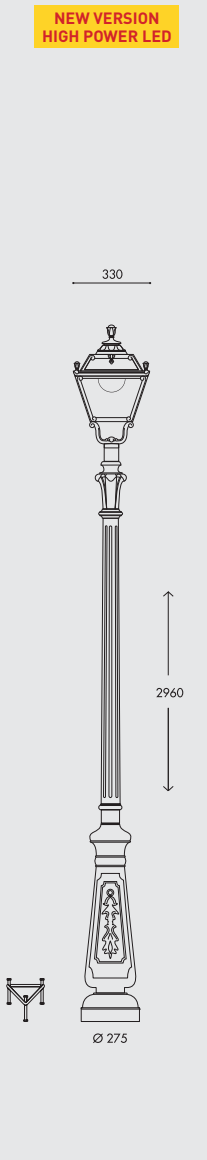

IP55

**NEBO OFIR/TOBIA 2L**

<b>30W LED</b>	4000K	Q33.201.R20.Q1L
<b>3000K</b>		Q33.201.R20.Q1R

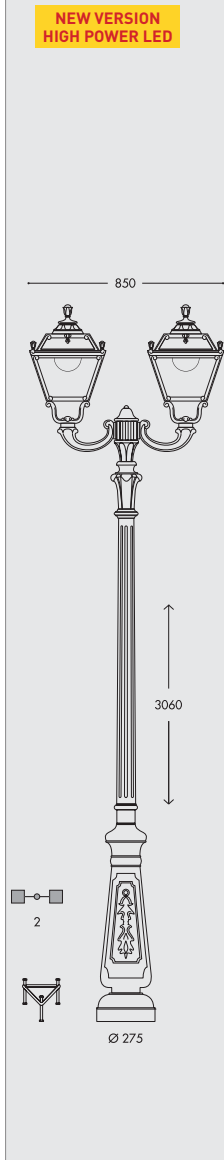

IP55

**SMALL LANTERN**

- ANNA
- SABA
- GLOBE250

**MEDIUM LANTERN**

- RUT
- SALEM
- GOLIA
- CEFA
- GLOBE 300

**LARGE LANTERN**

- NOEMI
- SILIOE
- TOBIA
- SIMON

**HALF LANTERN**

- IESSE/DARIA

**BOLLARD**

- SAURO/IRELLA

MADE IN  
ITALY

**NEW VERSION  
HIGH POWER  
LED**

U33.132.Q1R

E27 HIGH POWER LED

**INDOOR &  
OUTDOOR  
USE**

+80°C  
-30°C

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT

**15W** (1500 lm)  
**30W** (3300 lm)  
**50W** (5000 lm)


More details at page 62





AVAILABLE COLORS

RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



E27 HIGH POWER LED VERSION

15W <b>NEW</b>		30W	
1500 lm		3300 lm	
100-240V 50/60 Hz		100-240V 50/60 Hz	
4000K	3000K	4000K	3000K
= 100W INCANDESCENT		= TOBIA HOI-SON 70W	




**OFIR/SIMON**



IP55

<b>15W LED</b> 4000K	U33.132.R1L	<b>NEW</b>
<b>LED</b> 3000K	U33.132.R1R	
<b>30W LED</b> 4000K	U33.132.Q1L	
<b>LED</b> 3000K	U33.132.Q1R	

**NEW VERSION HIGH POWER LED**

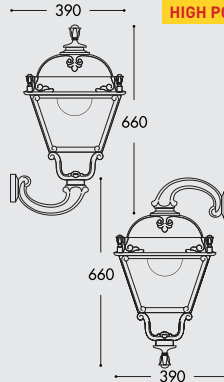

box: 1pcs

MEDIUM LANTERN




**LOT/SIMON**

<b>15W LED</b> 4000K	U33.113.R1L	<b>NEW</b>
<b>LED</b> 3000K	U33.113.R1R	
<b>30W LED</b> 4000K	U33.113.Q1L	
<b>LED</b> 3000K	U33.113.Q1R	



IP55

**NEW VERSION HIGH POWER LED**



box: 1pcs


**SICHEM/SIMON**

<b>15W LED</b> 4000K	U33.121.R1L	<b>NEW</b>
<b>LED</b> 3000K	U33.121.R1R	
<b>30W LED</b> 4000K	U33.121.Q1L	
<b>LED</b> 3000K	U33.121.Q1R	



IP55

**NEW VERSION HIGH POWER LED**



box: 1pcs

LARGE LANTERN



HALF LANTERN



BOLLARD





E27 HIGH POWER LED VERSION					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	COMPARISON
 E27 HIGH POWER LED Ø 100	<b>NEW</b> <b>15W</b>	1500Lm	100-240V 50/60 Hz	4000K	=  100W INCANDESCENT
	<b>30W</b>	3300Lm	100-240V 50/60 Hz	4000K 3000K	=  TOBIA HSI-SON 70W



### IAFET.R/SIMON (resin)

**IP55**  
△ △

<b>15W LED</b>	4000K <b>3000K</b>	U33.162.R1L U33.162.R1R	<b>NEW</b>
<b>30W LED</b>	4000K <b>3000K</b>	U33.162.Q1L U33.162.Q1R	

**NEW VERSION HIGH POWER LED**

*box: 2pcs*

**IP55**  
◆ △ △

ARTU'/SIMON	GIGI/SIMON	RICU/SIMON
<b>NEW</b> <b>15W LED</b> 4000K U33.158.R1L <b>3000K</b> U33.158.R1R	<b>15W LED</b> 4000K U33.156.R1L <b>3000K</b> U33.156.R1R	<b>15W LED</b> 4000K U33.157.R1L <b>3000K</b> U33.157.R1R
<b>30W LED</b> 4000K U33.158.Q1L <b>3000K</b> U33.158.Q1R	<b>30W LED</b> 4000K U33.156.Q1L <b>3000K</b> U33.156.Q1R	<b>30W LED</b> 4000K U33.157.Q1L <b>3000K</b> U33.157.Q1R

**NEW VERSION HIGH POWER LED**

*box: 2pcs*

**NEW VERSION HIGH POWER LED**

*box: 2pcs*

**NEW VERSION HIGH POWER LED**

*box: 2pcs*

**"METAL POST COVERED BY RESIN"**

STEEL  
RESIN  
EXPANSE

**fumaTech**  
FUMAGALLI POLES TECHNOLOGY

**ANTI RUST LIFETIME GUARANTEE**  
NO PAINTING REQUIRED


**MADE IN ITALY**

**ANTI CORROSION** **UV-RAYS STABILIZED** **NO MAINTENANCE** **DOUBLE INSULATION** **NOT AFFECTED BY CHEMICAL FERTILIZES**




**NEBO/SIMON**

<b>30W LED</b>	4000K	U33.201.Q1L
	<b>3000K</b>	U33.201.Q1R

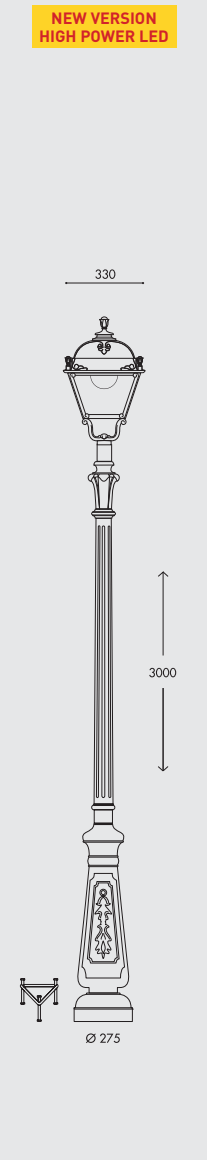

**NEBO OFIR/SIMON 2L**

<b>30W LED</b>	4000K	U33.201.R20.Q1L
	<b>3000K</b>	U33.201.R20.Q1R

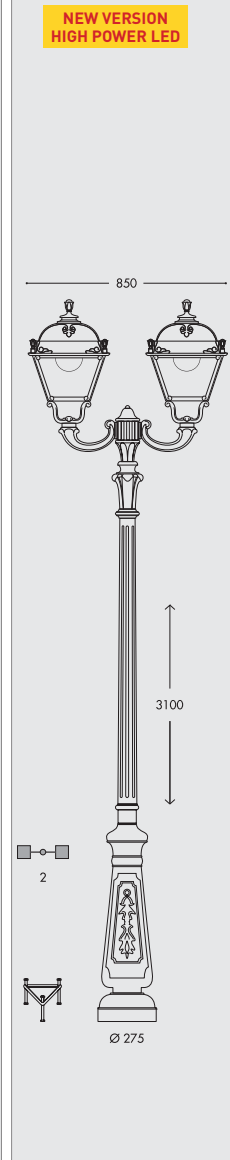

IP55

IP55

# HALF LANTERN

MADE IN  
ITALY

M22.000.F1R



E27 FILAMENT LED

**INDOOR &  
OUTDOOR  
USE**

+80°C  
-30°

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT

6W (800 lm)  
8W (1000 lm)

More details at page 60



AVAILABLE COLORS

RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



ENERGY CLASS

интергия - энергия

A+ A A- B C D E

**A+**

E27 LED FILAMENT VERSION


6W	12W
800 lm	1500 lm
100-240V 50/60 Hz	100-240V 50/60 Hz
4000K 2700K	4000K 2700K
 60W INCANDESCENT	 100W INCANDESCENT



## IESSE

6W 4000K M22.000.F1L  
2700K M22.000.F1R

E27 M22.000.E27

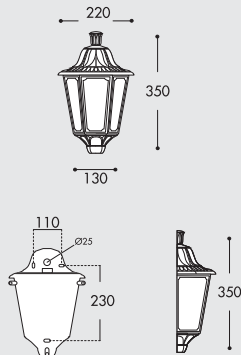

Master box: 16pcs


## MEDIUM LANTERN



## DARIA

12W 4000K M28.000.N1L  
2700K M28.000.N1R

E27 M28.000.E27

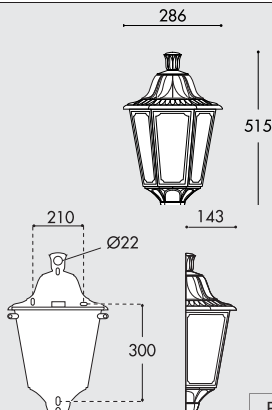

E27 SUITABLE FOR  
 MBF - HQI - SON

## LARGE LANTERN



## HALF LANTERN



## BOLLARD



# SAURO

CLASSIC BOLLARD





MADE IN ITALY

D15.554.D1LCRB



AVAILABLE COLORS



LED VERSION


E27 VERSION



**LED SAURO 1100 E27**

LAMP INCLUDED: GX53 LED

<b>7W</b>	4000K	D15.555.C1LCRB
	3000K	D15.555.C1RCRB
<b>10W</b>	4000K	D15.555.D1LCRB
	3000K	D15.555.D1RCRB
<b>E27</b>		D15.555.E27

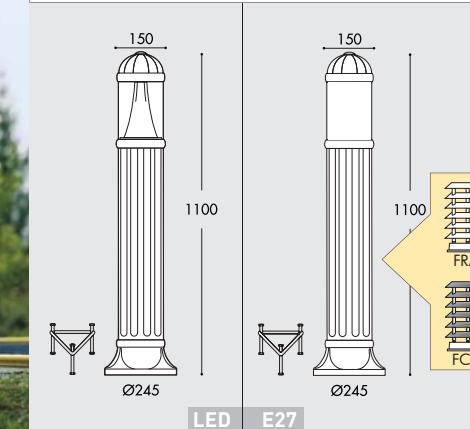


MEDIUM LANTERN



**LED SAURO 800 E27**

LAMP INCLUDED: GX53 LED

<b>7W</b>	4000K	D15.554.C1LCRB
	3000K	D15.554.C1RCRB
<b>10W</b>	4000K	D15.554.D1LCRB
	3000K	D15.554.D1RCRB
<b>E27</b>		D15.554.E27

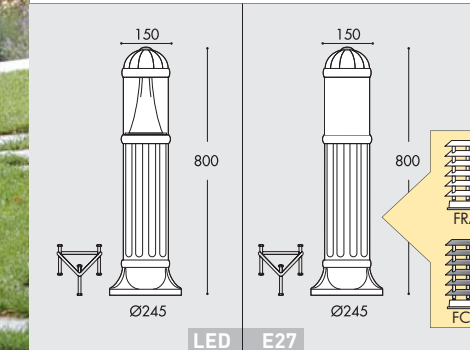

LARGE LANTERN








HALF LANTERN




BOLLARD




BOLLARD LED VERSIONS					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
	<b>7W</b>	<b>800Lm</b>	100-240V 50/60 Hz	4000K	 <b>75W</b> INCANDESCENT
				3000K	
	<b>10W</b>	<b>1200Lm</b>	100-240V 50/60 Hz	4000K	 <b>100W</b> INCANDESCENT
				3000K	

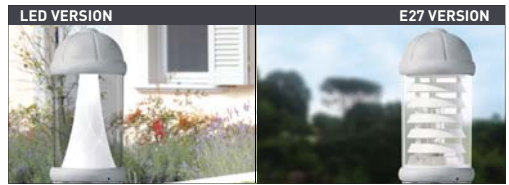


## LED SAURO 500 E27

**LAMP INCLUDED:**  
**GX53 LED** 

<b>7W</b>	4000K	D15.553.C1LCRB
<b>3000K</b>		D15.553.C1RCRB
<b>10W</b>	4000K	D15.553.D1LCRB
<b>3000K</b>		D15.553.D1RCRB
<b>E27</b>		D15.553.E27





150  
500  
Ø245




150  
500  
Ø245

with white resin louvre  
**FRA**


with aluminium chrome louvre  
**FC1**


## LED MIRELLA E27

**LAMP INCLUDED:**  
**GX53 LED** 

<b>7W</b>	4000K	D15.505.C1LCRB
<b>3000K</b>		D15.505.C1RCRB
<b>10W</b>	4000K	D15.505.D1LCRB
<b>3000K</b>		D15.505.D1RCRB
<b>E27</b>		D15.505.E27





520  
240



520  
240

with white resin louvre  
**FRA**

with aluminium chrome louvre  
**FC1**





# TÜV CERTIFIED LED MODULES



## Power surges resistant

- **Wide voltage range (100-240V)** to protect the driver both from voltage droop and voltage overshoot, which are quite frequent in case of outdoor installations.
- **Double 400V capacitors** and multiple resistances to withstand power surges.
- **Silicone paste** to avoid – in case of voltage swings - the vibration of the electronic components of the driver and the consequent risk of components unsoldering.



## Heat resistant - Working temperature -30°+80°C

- **Gold wire bonding:** Chips connected by pure gold wires, which are able to withstand at the highest and lowest temperatures and at temperature fluctuations between day and night. The gold wire bonding can grant a lumens maintenance factor > 80%.
- **Silicone paste:** Thermoconductive silicone paste with metal powder inside for helping heat dissipation and avoid overheating problems and for protecting the electronic components in case of high and low temperatures.



## Humidity resistant - Weatherproof driver for a longer lifetime

- **Silicone paste:** The driver is fully enclosed in a special silicone paste, which ensures the highest driver protection against moisture and humidity up to 90%, both unavoidable in outdoor installations.



LVD  
TESTED

**LVD Certificate:** Fumagalli lamps fulfil the Low Voltage Directive 2014/35/EU, therefore are CE marked and comply with safety requirements like protection against electrical shock, moisture and heat resistance, resistance to flame and ignition.

EMC  
TESTED

**EMC Certificate:** Fumagalli lamps meet the Electromagnetic Compatibility Directive 2014/30/EU

ERP  
6000 h

**ERP Attestation of conformity:** Fumagalli lamps fulfil the European Ecodesign Directive 2009/125/EC about the energy performance requirements of energy related products.





CB  
SCHEME

**IECEE CB Certificate:** Fumagalli lamps meet the International System for Conformity and Certification of Electrotechnical Equipment allowing direct market access in more than 50 countries all over the world.

Tested according to :  
EN 62560:2012/A1: 2015  
IEC/TR 62778:2014  
EN 62493:2015



## G9 LED

		POWER	<b>NEW 1,7 W</b>	
		LUMINOUS FLUX	<b>170 lm</b>	
SIZE & SOCKET				
<div style="border: 1px solid black; padding: 5px;"> <p><b>INDOOR &amp; OUTDOOR USE</b></p> <p>-30 +80 °C     90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> </div>  <p>IECEE CB CERTIFICATE: SG PSB-LE-02130</p>	LVD tested	EFFICIENCY	100 lm/W	
	EMC tested	VOLTAGE	100-240 V	
	ERP 6000h	FREQUENCY	50/60 Hz	
		CURRENT	17 mA	
		COLOR RENDERING INDEX RA	80	
		BEAM ANGLE	110°	
		WARM UP TIME	≤ 0,5"	
		SWITCHING CYCLE	> 40.000	
		LIFETIME	15.000 h	
		KELVIN	4000 K	3000 K
	REF. CODE	H.LED.G09.4K		H.LED.G09.3K

## GU10 LED

		POWER	<b>3,5 W</b>	
		LUMINOUS FLUX	<b>400 lm</b>	
SIZE & SOCKET				
<div style="border: 1px solid black; padding: 5px;"> <p><b>INDOOR &amp; OUTDOOR USE</b></p> <p>-30 +80 °C     90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> </div>  <p>IECEE CB CERTIFICATE: SG PSB-LE-01714</p>	LVD tested	EFFICIENCY	114 lm/W	
	EMC tested	VOLTAGE	100-240 V	
	ERP 6000h	FREQUENCY	50/60 Hz	
		CURRENT	70 mA	
		COLOR RENDERING INDEX RA	> 80	
		BEAM ANGLE	36°	
		WARM UP TIME	≤ 0,5"	
		SWITCHING CYCLE	> 25.000	
		LIFETIME	25.000 h	
		KELVIN	4000 K	3000 K
	REF. CODE	H.LED.GU10		H.LED.GU10.3K
COMPARISON	<p><b>3,5W = 50W</b> <b>400 lm = halogen</b></p> 			

## E27 LED FILAMENT A60

		POWER	<b>6 W</b>		<b>8 W</b>		
		LUMINOUS FLUX	<b>800 lm</b>		<b>1000 lm</b>		
		SIZE & SOCKET					
		EFFICIENCY	133 Lm/W		125 Lm/W		
		VOLTAGE	100-240 V		100-240 V		
		FREQUENCY	50/60 Hz		50/60 Hz		
		CURRENT	60 mA		76 mA		
		POWER FACTOR	> 0,7		> 0,7		
		COLOR RENDERING INDEX RA	> 80		> 80		
		BEAM ANGLE	360°		360°		
WARM UP TIME	≤ 0,5"		≤ 0,5"				
SWITCHING CYCLE	> 100.000		> 100.000				
LIFETIME	25.000 h		25.000 h				
KELVIN	4000K	2700 K	4000K	2700 K			
REF. CODE	H.LED.FIL.4K		H.LED.FIL.3K		H2.LED.FIL.4K H2.LED.FIL.3K		
COMPARISON	<b>6W</b> 800 Lm  = 60W incandescent  <b>SAVE 90%</b>		<b>8W</b> 1000 Lm  = 75W incandescent  <b>SAVE 89%</b>				


### SILICONE PROTECTION DRIVER



### INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT



IECEE CB CERTIFICATE:  
SG PSB-LE-01711

## E27 LED FILAMENT A70

		POWER	<b>12 W</b>			
		LUMINOUS FLUX	<b>1500 lm</b>			
		SIZE & SOCKET				
		EFFICIENCY	125 Lm/W			
		VOLTAGE	100-240 V			
		FREQUENCY	50/60 Hz			
		CURRENT	100 mA			
		POWER FACTOR	> 0,7			
		COLOR RENDERING INDEX RA	> 80			
		BEAM ANGLE	360°			
WARM UP TIME	≤ 0,5"					
SWITCHING CYCLE	> 100.000					
LIFETIME	25.000 h					
KELVIN	4000K		2700K			
REF. CODE	H3.LED.FIL.4K		H3.LED.FIL.3K			
COMPARISON	<b>12W</b> 1500 Lm  = 100W incandescent  <b>SAVE 88%</b>					

### SILICONE PROTECTION DRIVER



### INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT



IECEE CB CERTIFICATE:  
SG PSB-LE-01711

## SILICONE PROTECTION

DRIVER



**INDOOR &  
OUTDOOR USE**

-30 +80 °C

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT



## GOLD WIRE BONDING

- LED chips connected by **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.



## PHOSPHOR DISPENSING

- Filaments covered by Intermatix phosphor.
- Phosphor dispensed on both side of the filament allowing a better light reflection.



## BULB GLASS

- Bulb glass with **90% hydrogen gas** inside to help heat dissipation.
- Filament welded and inserted into the glass by an automatic process - instead of by hand - to get a much more precise result.



## SAPPHIRE CHIP SUPPORT



## CHIP ON CORD TECHNOLOGY

- Epistar led chips bounded on pure synthetic **sapphire** substrate.
- Improved shock resistance.
- Higher transparency, increased lumen output and better heat dissipation in comparison with glass or ceramic substrate.



## DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.



## THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime.
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the desoldering of the electronic components of the driver.



## E27 HIGH POWER LED

POWER	<b>NEW</b> 15 W	30 W
LUMINOUS FLUX	<b>1500 lm</b>	<b>3300 lm</b>
SIZE & SOCKET		
EFFICIENCY	100 Lm/W	110 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	130 mA	135 mA
POWER FACTOR	> 0,5	> 0,9
COLOR RENDERING INDEX RA	> 80	> 80
BEAM ANGLE	200°	200°
WARM UP TIME	< 0,5"	< 1"
SWITCHING CYCLE	30.000	30.000
LIFETIME	25.000 h	25.000 h
KELVIN	4000 K   3000 K	4000 K   3000 K
REF. CODE	H3.LED.HIP.4K   H3.LED.HIP.3K	H2.LED.HIP.4K   H2.LED.HIP.3K
COMPARISON	15W 1500 Lm = 100W incandescent <b>SAVE 85%</b>	30W 3300 Lm = 50W HQI-SON <b>SAVE 40%</b>

**INDOOR & OUTDOOR USE**

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT

## E27 HIGH POWER LED

POWER	50 W	<b>NEW</b> 60 W
LUMINOUS FLUX	<b>5000 lm</b>	<b>7000 lm</b>
SIZE & SOCKET		
EFFICIENCY	100 Lm/W	116 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	210 mA	290 mA
POWER FACTOR	> 0,9	> 0,9
COLOR RENDERING INDEX RA	> 80	> 80
BEAM ANGLE	200°	200°
WARM UP TIME	< 1"	< 0,5"
SWITCHING CYCLE	30.000	30.000
LIFETIME	25.000 h	25.000 h
KELVIN	4000 K   3000 K	4000 K   3000 K
REF. CODE	H.LED.HIP.4K   H.LED.HIP.3K	H4.LED.HIP.4K   H4.LED.HIP.3K
COMPARISON	50W 5000 Lm = 70W HQI-SON <b>SAVE 30%</b>	60W 7000 Lm = 100W HQI-SON <b>SAVE 40%</b>

**INDOOR & OUTDOOR USE**

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT

## R7s LED 78mm

**SILICONE PROTECTION**



DRIVER

**INDOOR & OUTDOOR USE**

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

CE LVD tested

TUV SUD EMC tested

ERP 6000h




Ø22mm

**NEW**

**ENERG** EU  
emission - consumption

A+  
A  
B  
C  
D  
E

**A+**

POWER	<b>NEW 4 W</b>	
LUMINOUS FLUX	<b>400 lm</b>	
SIZE & SOCKET	R7s 	
EFFICIENCY	100 Lm/W	
VOLTAGE	100-240 V	
FREQUENCY	50/60 Hz	
CURRENT	75 mA	
POWER FACTOR	> 0,5	
COLOR RENDERING INDEX RA	> 80	
BEAM ANGLE	360°	
WARM UP TIME	≤ 0,5"	
SWITCHING CYCLE	45.000	
LIFETIME	25.000 h	
KELVIN	4000 K	3000 K
REF. CODE	H7.LED.R7S.4K	H7.LED.R7S.3K

## R7s LED 118mm

**SILICONE PROTECTION**



DRIVER

**INDOOR & OUTDOOR USE**

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

CE LVD tested

TUV SUD EMC tested

ERP 6000h



Ø22mm

**NEW**

**ENERG** EU  
emission - consumption


A+  
A  
B  
C  
D  
E

**A+**

POWER	<b>NEW 8,5 W</b>	
LUMINOUS FLUX	<b>900 lm</b>	
SIZE & SOCKET	R7s 	
EFFICIENCY	106 Lm/W	
VOLTAGE	100-240 V	
FREQUENCY	50/60 Hz	
CURRENT	168 mA	
POWER FACTOR	> 0,5	
COLOR RENDERING INDEX RA	> 80	
BEAM ANGLE	360°	
WARM UP TIME	≤ 0,5"	
SWITCHING CYCLE	45.000	
LIFETIME	25.000 h	
KELVIN	4000 K	3000 K
REF. CODE	H8.LED.R7S.4K	H8.LED.R7S.3K

## R7s LED 189mm

**SILICONE PROTECTION**



DRIVER

**INDOOR & OUTDOOR USE**

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

CE LVD tested

TUV SUD EMC tested

ERP 6000h




Ø22mm

**NEW**








**ENERG** EU  
emission - consumption

A+  
A  
B  
C  
D  
E









**A+**

POWER	<b>NEW 11 W</b>	
LUMINOUS FLUX	<b>1200 lm</b>	
SIZE & SOCKET	R7s 	
EFFICIENCY	110 Lm/W	
VOLTAGE	100-240 V	
FREQUENCY	50/60 Hz	
CURRENT	170 mA	
POWER FACTOR	> 0,5	
COLOR RENDERING INDEX RA	> 80	
BEAM ANGLE	360°	
WARM UP TIME	≤ 0,5"	
SWITCHING CYCLE	45.000	
LIFETIME	25.000 h	
KELVIN	4000 K	3000 K
REF. CODE	H9.LED.R7S.4K	H9.LED.R7S.3K

## GX53 LED Ø75







		POWER	<b>3 W</b>	
		LUMINOUS FLUX	<b>350 lm</b>	
		SIZE & SOCKET		
		EFFICIENCY	116 Lm/W	
		VOLTAGE	100-240 V	
		FREQUENCY	50/60 Hz	
		CURRENT	30 mA	
		COLOR RENDERING INDEX RA	> 80	
		BEAM ANGLE	120°	
		WARM UP TIME	≤ 0,5"	
		SWITCHING CYCLE	> 30.000	
		LIFETIME	25.000 h	
		KELVIN	4000 K	3000 K
		REF. CODE	H.LED.G53	H.LED.G53.3K
		COMPARISON		

## GX53 LED Ø100mm

		POWER	<b>7 W</b>	<b>10 W</b>
		LUMINOUS FLUX	<b>800 lm</b>	<b>1200 lm</b>
		SIZE & SOCKET		
		EFFICIENCY	114 Lm/W	120 Lm/W
		VOLTAGE	100-240 V	100-240 V
		FREQUENCY	50/60 Hz	50/60 Hz
		CURRENT	34 mA	48 mA
		POWER FACTOR	0,9	0,9
		COLOR RENDERING INDEX RA	> 80	> 80
		BEAM ANGLE	120°	120°
		WARM UP TIME	≤ 0,5"	≤ 0,5"
		SWITCHING CYCLE	> 30.000	> 30.000
		LIFETIME	25.000 h	25.000 h
		KELVIN	4000 K	3000 K
		REF. CODE	H2.LED.G53	H2.LED.G53.3K
		REF. CODE	H3.LED.G53	H3.LED.G53.3K
		COMPARISON	 	



## GX53 LED Ø180mm

		POWER	<b>7 W</b> <span style="color:red">NEW</span>		<b>11 W</b>		<b>18 W</b>		
		LUMINOUS FLUX	<b>600 lm</b>		<b>1300 lm</b>		<b>2000 lm</b>		
		SIZE & SOCKET							
		EFFICIENCY	86 Lm/W		118 Lm/W		111 Lm/W		
		VOLTAGE	100-240 V		100-240 V		100-240 V		
		FREQUENCY	50/60 Hz		50/60 Hz		50/60 Hz		
		CURRENT	60 mA		150 mA		200 mA		
		POWER FACTOR	0,5		0,9		0,9		
		CRI (RA)	> 80		> 80		> 80		
		BEAM ANGLE	90°		90°		90°		
WARM UP TIME	≤ 0,5"		≤ 0,5"		≤ 0,5"				
SWITCHING CYCLE	30.000		> 25.000		> 25.000				
LIFETIME	25.000 h		25.000 h		25.000 h				
KELVIN	4000 K	3000 K	4000 K	3000 K	4000 K	3000 K			
REF. CODE	H6.LED.G53.4K   H6.LED.G53.3K		H4.LED.G53   H4.LED.G53.3K		H5.LED.G53.4K   H5.LED.G53.3K				
COMPARISON	<b>7W = 60W</b>  <span style="color:orange">SAVE 88%</span>		<b>11W = 100W</b>  <span style="color:orange">SAVE 89%</span>		<b>18W = 150W</b>  <span style="color:orange">SAVE 88%</span>				

SILICONE PROTECTION

DRIVER



(11W-18W)

**INDOOR & OUTDOOR USE**

-30 +80 °C    90% HUMIDITY

VOLTAGE SURGE RESISTANT



LVD tested



EMC tested

ERP 6000h



IECEE CB CERTIFICATE:  
SG PSB-LE-01704  
SG PSB-LE-01713

## LOOKING FOR A MODERN DESIGN PRODUCT?

See our **Top selection 2019** dedicated to  
our **modern range!**



TO SEE OUR COMPLETE COLLECTION

Ask for our  
**General Catalogue 2019**  
or visit our website at  
**[www.fumagalli.it](http://www.fumagalli.it)**



**137**  
DISTRIBUTORS  
ALL OVER THE WORLD  
**MADE IN ITALY**

# RESIN MATERIAL ADVANTAGES



NO MAINTENANCE



ANTI-CORROSION



DOUBLE INSULATION



NOT AFFECTED BY CHEMICAL FERTILIZERS



UV-RAY STABILIZED



RECYCLABLE



UV TREATED



DOUBLE INSULATION



ANTI-SHOCK



TEMPERATURE



ENERGY SAVING



RESIDENTIAL



PUBLIC

## HOW TO READ THE CODE

**DIFFUSER**  
IDENTIFIES THE DIFFUSER

**E22**

**STRUCTURE**  
IDENTIFIES THE STRUCTURE ON WHICH THE DIFFUSER IS MOUNTED (POLE, BRACKET, BASE, SPIKE)

**156**

**SYSTEM**  
IDENTIFIES THE MULTILIGHT SYSTEM IF PRESENT

**S20**

**COLOUR OF THE STRUCTURE**  
IDENTIFIES THE COLOUR OF THE STRUCTURE

**A** BLACK  
**W** WHITE  
**L** GREY  
**V** ANTIQUE GREEN\*  
**B** ANTIQUE BRONZE\*

**A**

**COLOUR OF THE DIFFUSER**  
IDENTIFIES THE COLOUR OF THE DIFFUSER

**X** CLEAR  
**Y** OPAL  
**Z** SMOKED

**X**

**ELECTRIFICATION**  
IDENTIFIES THE TYPE OF ELECTRIFICATION AND THE EVENTUAL PRESENCE OF BULBS

**F1R**

MADE IN  
ITALY



Fumagalli S.r.l.  
Via Ca' Bassa, 29  
21100 Varese - ITALY  
Tel. +39.0332.336353  
Fax. +39.0332.336358  
Email [italian.lux@fumagalli.it](mailto:italian.lux@fumagalli.it)



[www.fumagalli.it](http://www.fumagalli.it)

