



**fumagalli**<sup>®</sup>  
s i n c e 1 9 7 3



MADE IN  
ITALY



**TOP SELECTION PROJECT 2019**



# NOEMI

PAG 10



# SILOE

PAG 10



# TOBIA

PAG 12



# SIMON

PAG 12







**ELIA**

PAG 16



**PIETRO**

PAG 16



**GLOBE**

PAG 20



**CLASSIC  
RANGE**

# E27 HIGH POWER LED


CLASSIC RANGE







## E27 HIGH POWER LED



for details see pag. 56



E35.201.R20.Q1R



3070

**NEW VERSION  
HIGH POWER LED**

**NEBO/OFIR  
NOEMI 2L**  
for details see pag. 10



**HOREB/ELIA**  
for details see pag. 16

Q43.207.H1L

4180





**NEBO/TOBIA**  
for details see pag. 12

Q33.201.Q1R



3000



U33.113.Q1R

**LOT/SIMON**  
for details see pag. 12



**OFIR/NOEMI**  
for details see pag. 10



E35.132.Q1R

## ADVANTAGES



**ANTI CORROSION**



**NO MAINTENANCE**




**UV-RAYS STABILIZED**



**DOUBLE INSULATION**



**NOT AFFECTED BY CHEMICAL FERTILIZES**



**FULLY MODULAR Ø60mm**

**RESIN POST OF A SINGLE PIECE WITHOUT JOINTS**


Stronger, safer and more durable





**INNER METAL POLE STRUCTURE**  
Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

**EXPANSE**  
High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

**OUTER RESIN COVER**  
Outer coating of a single piece without joints made of shockproof resin material:  
- Rust and corrosion-free  
- Paste molded colors, UV stabilized  
- Self-extinguishing on fire



**DIFFUSER**



**OFIR SYSTEM 2L - 3L**

5mt

4mt

3mt

2mt

1mt

0mt

NEBO

TABOR

KARMEL 3000

**POST**



**GLOBE 400**

**NOEMI**

**TOBIA**

**ELIA**

**SILOE**

**SIMON**

**PIETRO**

**DIFFUSER**

**ADAM SYSTEM  
2L - 3L**

5mt

4mt

3mt

2mt

1mt

0mt

**HOREB**

**KARMEL  
3500**

**KARMEL  
4000**

**GIONA  
4000**

**POST**

**GLOBE 500**

**PIETRO**

**ELIA**

**DIFFUSER**

**ARON SYSTEM  
1L - 2L - 4L**

5mt

4mt

3mt

2mt

1mt

0mt

**GIONA  
4500**

**GIONA  
5000**

**POST**

# NOEMI/SILOE HIGH POWER LED

## CLASSIC RANGE



MADE IN ITALY

**NEW VERSION  
HIGH POWER LED**

E27 HIGH POWER LED

**INDOOR &  
OUTDOOR  
USE**

+80°C  
-30°  
90% HUMIDITY  
VOLTAGE SURGE  
RESISTANT

**30W** (3300 lm)  
**50W** (5000 lm)

More details at page 59



### E27 HIGH POWER LED VERSIONS

30W HIGH POWER LED



50W HIGH POWER LED



### AVAILABLE COLORS

RESIN BODY

(MOULDED COLOURS)

BLACK (A)

WHITE (W)



DIFFUSER


CLEAR (X)



OPAL (Y)





DOUBLE INSULATION





NOEMI-SILOE 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
 E27 HIGH POWER LED Ø 100	30W	3300Lm	100-240V 50/60 Hz	4000K	
				3000K	


NOEMI-SILOE 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
 E27 HIGH POWER LED Ø 118	50W	5000Lm	100-240V 50/60 Hz	4000K	
				3000K	

## NOEMI



**NEW**

<b>30W LED</b>	4000K	E35.000.Q1L
	3000K	E35.000.Q1R
<b>50W LED</b>	4000K	E35.000.H1L
	3000K	E35.000.H1R




## SILOE



**NEW**

<b>30W LED</b>	4000K	K35.000.Q1L
	3000K	K35.000.Q1R
<b>50W LED</b>	4000K	K35.000.H1L
	3000K	K35.000.H1R



# TOBIA/SIMON HIGH POWER LED

## CLASSIC RANGE



MADE IN ITALY

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C  
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3300 lm)  
50W (5000 lm)

More details at page 59



NEW VERSION  
HIGH POWER LED



### E27 HIGH POWER LED VERSIONS

30W HIGH POWER LED

50W HIGH POWER LED



### AVAILABLE COLORS

RESIN BODY  
(MOULDED COLOURS)

DIFFUSER

BLACK (A)



WHITE (W)



CLEAR (X)

OPAL (Y)






TOBIA-SIMON 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 100	<b>30W</b>	<b>3300lm</b>	100-240V 50/60 Hz	4000K  3000K	<b>TOBIA-SIMON</b> =  <b>70W</b> Hqi-Son

TOBIA-SIMON 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	<b>50W</b>	<b>5000lm</b>	100-240V 50/60 Hz	4000K  3000K	<b>TOBIA-SIMON</b> =  <b>100W</b> Hqi-Son

## TOBIA



<b>30W LED</b>	4000K	Q33.000.Q1L
	<b>3000K</b>	Q33.000.Q1R
<b>50W LED</b>	4000K	Q33.000.H1L
	<b>3000K</b>	Q33.000.H1R




**NEW**

## SIMON



<b>30W LED</b>	4000K	U33.000.Q1L
	<b>3000K</b>	U33.000.Q1R
<b>50W LED</b>	4000K	U33.000.H1L
	<b>3000K</b>	U33.000.H1R



**NEW**



# TOBIA/SIMON GX53 LED

## CLASSIC RANGE



MADE IN ITALY



**FLAT  
DIFFUSER**



**AVAILABLE COLORS**

RESIN BODY <small>(MOULDED COLOURS)</small>		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)





TOBIA-SIMON 28W GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
	<b>4x7W 28W</b>	<b>3200Lm</b>	100-240V 50/60 Hz	4000K	TOBIA-SIMON = <b>70W</b>
				3000K	


TOBIA-SIMON 40W GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
	<b>4x10W 40W</b>	<b>4800Lm</b>	100-240V 50/60 Hz	4000K	TOBIA-SIMON = <b>100W</b>
				3000K	

## TOBIA

LAMP INCLUDED:  
**4x GX53  
LED**



<b>4x7W 28W</b>	4000K	Q35.000.C4L
	<b>3000K</b>	Q35.000.C4R
<b>4x10W 40W</b>	4000K	Q35.000.D4L
	<b>3000K</b>	Q35.000.D4R




FLAT DIFFUSER  
FOR GX53 LED  
VERSION  
IP65

## SIMON

LAMP INCLUDED:  
**4x GX53  
LED**



<b>4x7W 28W</b>	4000K	U35.000.C4L
	<b>3000K</b>	U35.000.C4R
<b>4x10W 40W</b>	4000K	U35.000.D4L
	<b>3000K</b>	U35.000.D4R



FLAT DIFFUSER  
FOR GX53 LED  
VERSION  
IP65

# ELIA/PIETRO HIGH POWER LED

## CLASSIC RANGE



TOBIA



SIMON



ELIA



PIETRO



**NEW VERSION  
HIGH POWER LED**



NEW HIGH POWER LED

**INDOOR &  
OUTDOOR  
USE**

+80°C  
-30°C

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT



**50W (5000 lm)**  
**60W (7000 lm)**

More details at page 59

### AVAILABLE COLORS

#### RESIN BODY

(MOULDED COLOURS)

BLACK (A)

WHITE (W)



#### DIFFUSER

CLEAR (X)

OPAL (Y)







DOUBLE INSULATION

DOUBLE INSULATION






ELIA/PIETRO 50W HIGH POWER LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE
 E27 HIGH POWER LED Ø 118	50W	5000lm	100-240V 50/60 Hz	4000K
			3000K	
 <b>ELIA-PIETRO 70W</b> <small>HQI-SON</small>				

ELIA/PIETRO 60W HIGH POWER LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE
 E27 HIGH POWER LED Ø 138	60W	7000lm	100-240V 50/60 Hz	4000K
			3000K	
 <b>ELIA-PIETRO 100W</b> <small>HQI-SON</small>				

## ELIA




<b>50W</b>	4000K	Q43.000.H1L
	3000K	Q43.000.H1R
<b>60W</b>	4000K	Q43.000.W1L
	3000K	Q43.000.W1R



## PIETRO



<b>50W</b>	4000K	U43.000.H1L
	3000K	U43.000.H1R
<b>60W</b>	4000K	U43.000.W1L
	3000K	U43.000.W1R



# ELIA/PIETRO GX53 LED

CLASSIC RANGE



MADE IN ITALY



**FLAT  
DIFFUSER**







**AVAILABLE COLORS**

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)






ELIA/PIETRO 56W GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
	<b>8x7W 56W</b>	<b>6400Lm</b>	100-240V 50/60 Hz	4000K	 <b>ELIA-PIETRO 100W</b>
				3000K	


ELIA/PIETRO 80W GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
	<b>8x10W 80W</b>	<b>9600Lm</b>	100-240V 50/60 Hz	4000K	 <b>ELIA-PIETRO 150W</b>
				3000K	

## ELIA

LAMP INCLUDED:  
**8x GX53 LED**

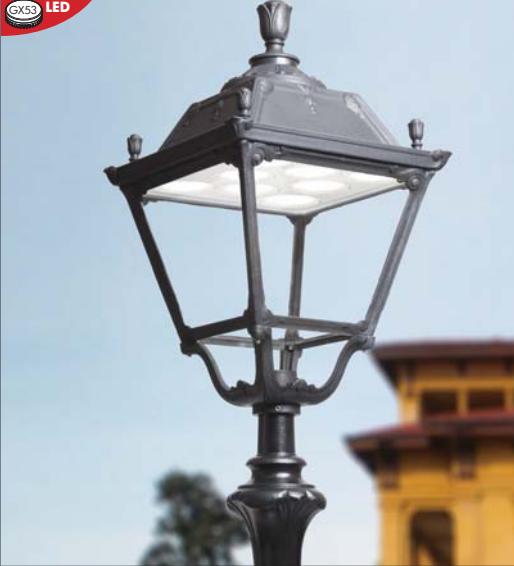

<b>8x7W 56W</b>	4000K	Q45.000.C8L
	<b>3000K</b>	Q45.000.C8R
<b>8x10W 80W</b>	4000K	Q45.000.D8L
	<b>3000K</b>	Q45.000.D8R



FLAT DIFFUSER  
FOR GX53 LED  
VERSION


IP65

## PIETRO

LAMP INCLUDED:  
**8x GX53 LED**



<b>8x7W 56W</b>	4000K	U45.000.C8L
	<b>3000K</b>	U45.000.C8R
<b>8x10W 80W</b>	4000K	U45.000.D8L
	<b>3000K</b>	U45.000.D8R



FLAT DIFFUSER  
FOR GX53 LED  
VERSION

IP65



# GLOBE 400/GLOBE 500

CLASSIC RANGE



MADE IN ITALY



## AVAILABLE COLORS

### RESIN BODY (MOULDED COLOURS)

BLACK (A)

WHITE (W)



### DIFFUSER

CLEAR (X)

OPAL (Y)

SMOKED (Z)




## GLOBE 400




E27

G40.B40.E27

ALUMINIUM  
CHROME  
LOUVRE



E27 VERSION  
SUITABLE FOR  
  
HQI - SON

## GLOBE 500




E27

G50.B50.E27

E40

G50.B50.E40

ALUMINIUM  
CHROME  
LOUVRE







E27 VERSION  
SUITABLE FOR  
  
HQI - SON

# CLASSIC POLES



EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

NEBO		TABOR		HOREB		KARMEL 3000		KARMEL 3500	
without door	000.201	without door	000.204	without door	000.207	without door	000.231	without door	000.234
with door	000.202	with door	000.205	with door	000.208	with door	000.232	with door	000.235
with door & box	000.203	with door & box	000.206	with door & box	000.209	with door & box	000.233	with door & box	000.236

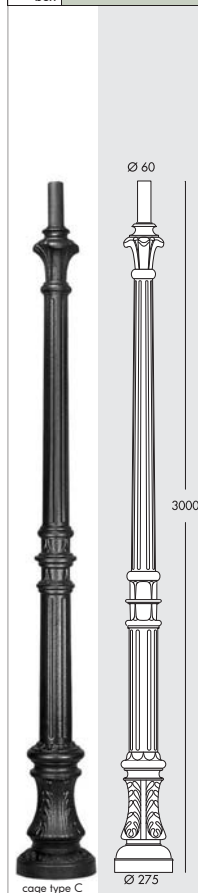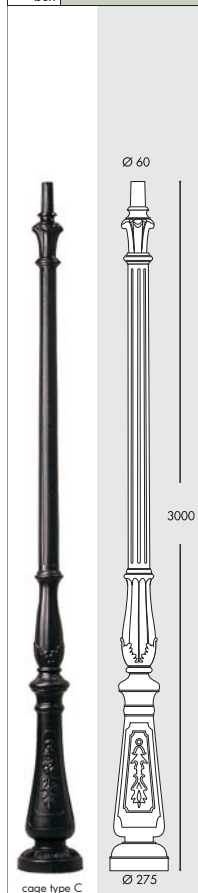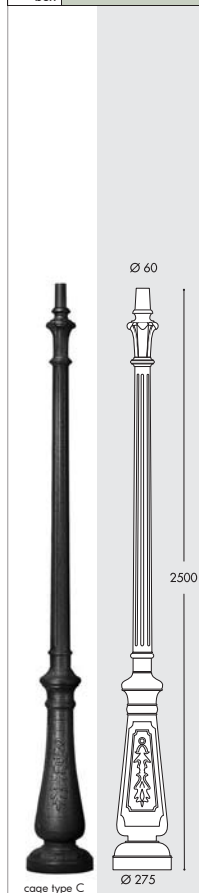




**AVAILABLE COLORS**  
**MOULDED COLOURS**

BLACK (A)


WHITE (W)




**EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION**



**CAGE - C**



**CAGE - D**



**CAGE - E**

**KARMEL 4000**

without door	000.237
with door	000.238
with door & box	000.239

**GIONA 4000**





without door	000.221
with door	000.222
with door & box	000.223

**GIONA 4500**

without door	000.224
with door	000.225
with door & box	000.226


**GIONA 5000**

without door	000.227
with door	000.228
with door & box	000.229

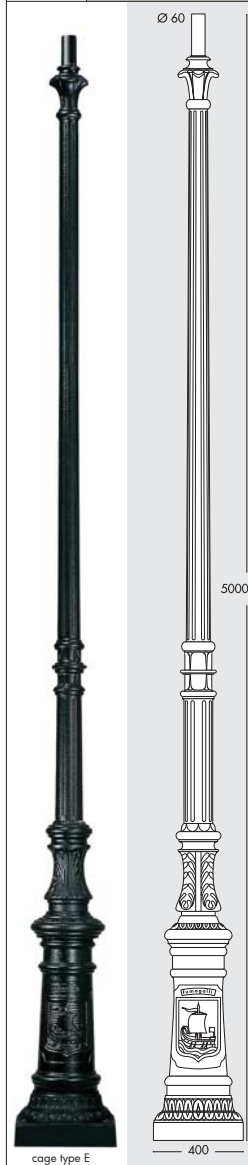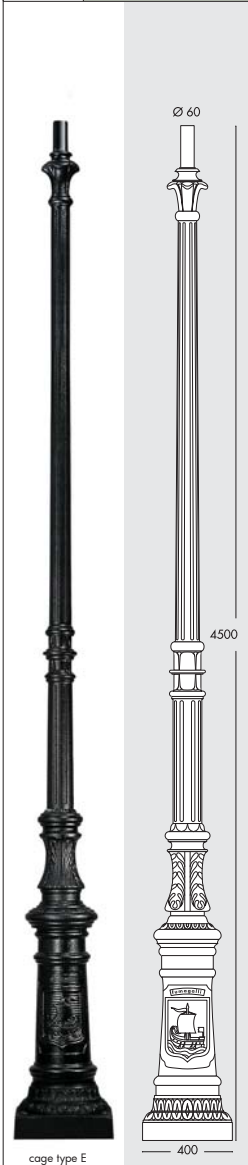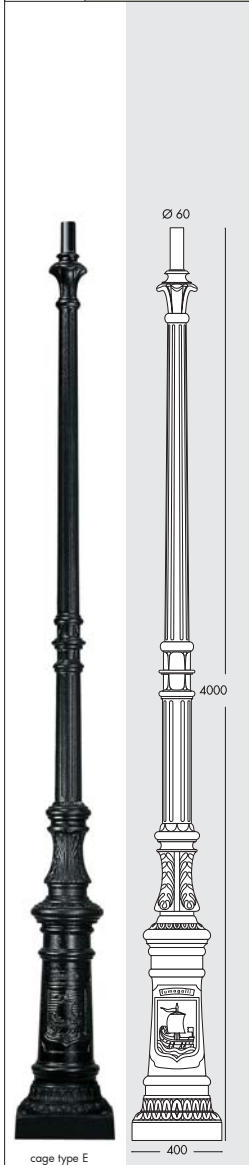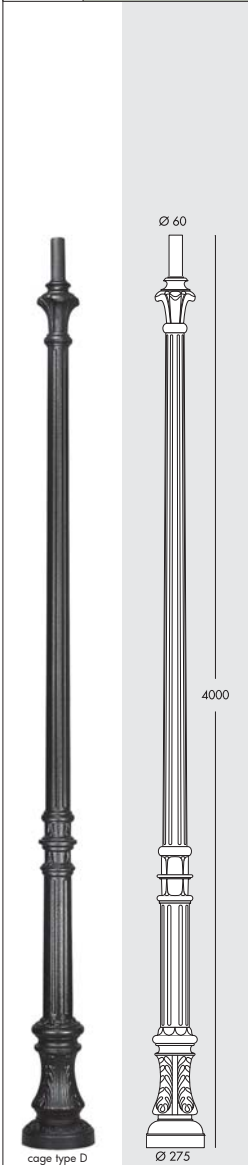

## OFIR WALL BRACKET

H.132.WAL



suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
GLOBE 400

Ø 60mm




### FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

## ADAM WALL BRACKET


H.171.WAL



suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
ELIA - PIETRO  
GLOBE

## LOT BASE


H.113



suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
ELIA - PIETRO  
GLOBE

## ARON WALL BRACKET


H.172 + H.172.WAL

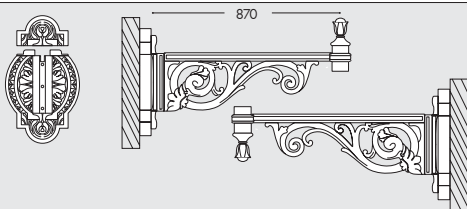

suggested diffuser:  
ELIA - PIETRO  
GLOBE 500

## ARON SYSTEM 1L


000.000.N10



suggested diffuser:  
ELIA - PIETRO  
GLOBE 500

## OFIR SYSTEM 2L

000.000.R20




Ø60

suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
GLOBE 400

## OFIR SYSTEM 3L

000.000.R30




Ø60

suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
GLOBE 400

## ADAM SYSTEM 2L

000.000.M20




Ø60

suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
ELIA - PIETRO  
GLOBE

## ADAM SYSTEM 3L

000.000.M30




Ø60

suggested diffuser:  
SILOE - NOEMI  
SIMON - TOBIA  
ELIA - PIETRO  
GLOBE

## ARON SYSTEM 2L

000.000.N20

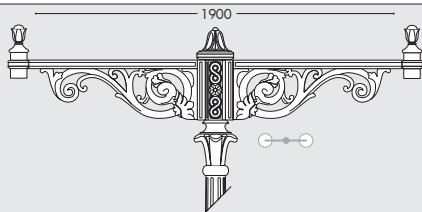


Ø60

suggested diffuser:  
ELIA - PIETRO  
GLOBE 500

## ARON SYSTEM 4L

000.000.N40

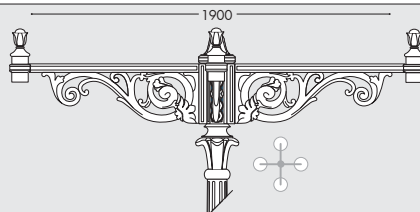

Ø60

suggested diffuser:  
ELIA - PIETRO  
GLOBE 500



## GIUSEPPE

PAG 34



## GINO

GINO400 PAG 40  
GINO500 PAG 46



## REMO

REMO400 PAG 40  
REMO500 PAG 46



## VIVI

VIVI400 PAG 36  
VIVI500 PAG 42







## ECOVIVI

ECOVIVI400 PAG 38  
ECOVIVI500 PAG 44



## BEPPE

BEPPE400 PAG 36  
BEPPE500 PAG 42



## ECOBEPPE

ECOBEPPE400 PAG 38  
ECOBEPPE500 PAG 44



## GLOBE

GLOBE400 PAG 48  
GLOBE500 PAG 48

**MODERN  
RANGE**



# E27 HIGH POWER LED

MODERN RANGE





## E27 HIGH POWER LED



for details see pag. 59





V50.364.A10.H1L

3255

**EKTOR 3000  
MIDIPILAR/  
VIVI 400 1L**  
for details see pag. 36

P50.361.H1L



**EKTOR 2500/  
BEPPE 400**  
for details see pag. 36

3065



EKTOR 2500/  
GIORGIO  
for details see pag. 34



4P2.361.G10.E28

2700



ANTI RUST

LIFETIME  
GUARANTEE

NO PAINTING  
REQUIRED

MADE IN  
ITALY



R50.254

MIDIPILAR/  
REMO 400  
for details see pag. 40

F50.115



NEW LOT/  
GINO 400  
for details see pag. 40

**ADVANTAGES**



**ANTI CORROSION**



**NO MAINTENANCE**




**UV-RAYS STABILIZED**



**DOUBLE INSULATION**




**NOT AFFECTED BY CHEMICAL FERTILIZES**




**FULLY MODULAR  
Ø60mm**



**SINGLE LIGHT**

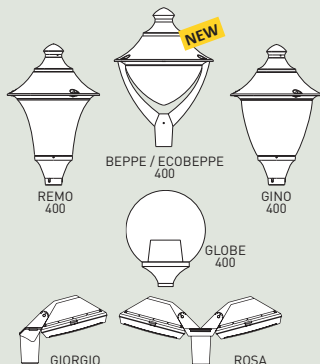


**DIFFUSER**

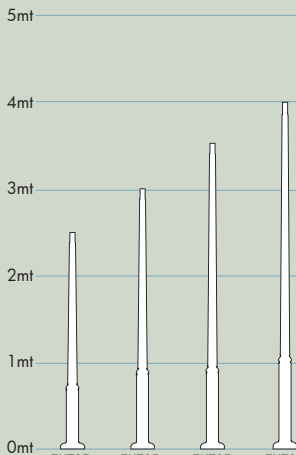


**POST**

**SINGLE LIGHT**

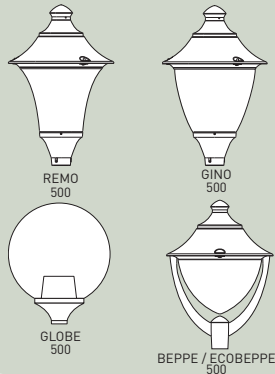


**DIFFUSER**

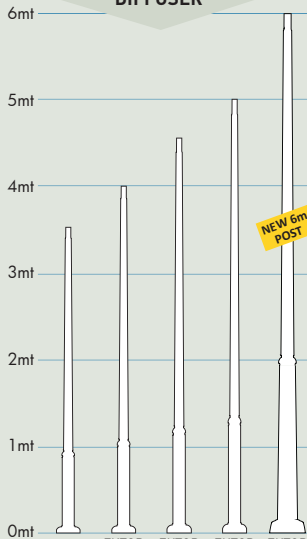

**POST**

**RESIN POST OF A SINGLE PIECE WITHOUT JOINTS**

**Stronger, safer and more durable**



**INNER METAL POLE STRUCTURE**

Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

**EXPANSE**


High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

**OUTER RESIN COVER**


Outer coating of a single piece without joints made of shockproof resin material:

- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire


## MULTI-HEAD LIGHTS

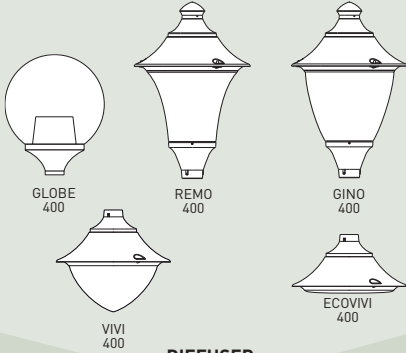

## DIFFUSER

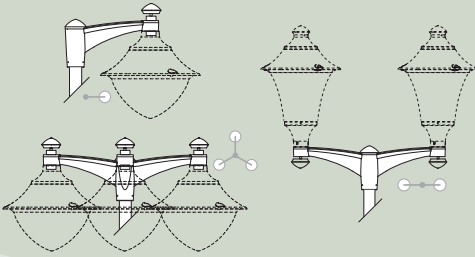


## MIDIPILAR 1L - 2L - 3L

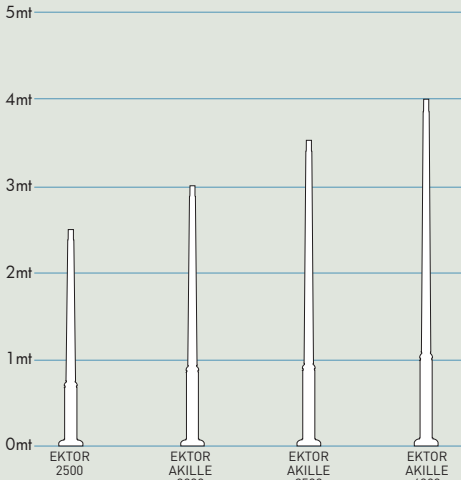


## POST


## MULTI-HEAD LIGHTS

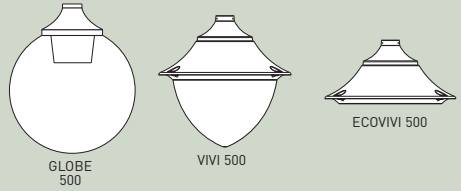

## DIFFUSER

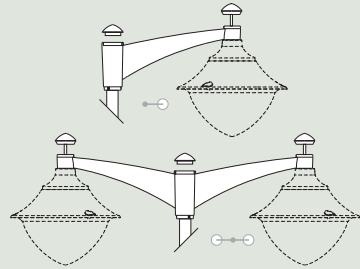

## PILAR 1L - 2L

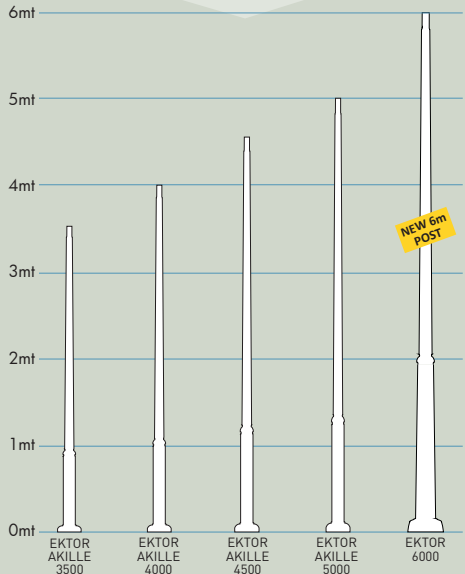

**NEW 6m POST**


## POST



### GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**  
long-life and efficient LED light sources
- **Built-in driver:**  
quick and easy lamp replacement
- **Great flexibility:**  
GX53 standard lamp holder
- **Future-proofed luminaires:**  
performances easy to upgrade to latest technology developments




AVAILABLE COLORS		
RESIN BODY (MOULDED COLOURS)		
BLACK (A)	GREY (L)	WHITE (W)
DIFFUSER		
OPAL (Y)		

AVAILABLE VERSIONS		
<b>GX53 LED</b>  LED GX53	<b>4x GX53</b>  LED GX53	<b>2x E27</b>  CFL LED







GIORGIO/ROSA 4xGX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
	4x7W <b>28W</b>	<b>3200Lm</b>	100-240V 50/60 Hz	4000K 3000K	<b>70W</b> HQI - SON
	4x10W <b>40W</b>	<b>4800Lm</b>	100-240V 50/60 Hz	4000K 3000K	<b>100W</b> HQI - SON

GIORGIO/ROSA GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
	<b>18W</b>	<b>2000Lm</b>	100-240V 50/60 Hz	4000K 3000K	<b>150W</b> INCANDESCENT

### GX53 LED

LAMP INCLUDED:  
**4x GX53 LED**




### GIORGIO

2xE27

<b>2xE27</b>	4P2.000.G10.E28
<b>GX53 18W</b>	4000K 4P1.000.G10.E1L 3000K 4P1.000.G10.E1R
<b>4x7W 28W</b>	4000K 4P2.000.G10.C4L 3000K 4P2.000.G10.C4R
<b>4x10W 40W</b>	4000K 4P2.000.G10.D4L 3000K 4P2.000.G10.D4R

Fully adjustable position.



### GX53 LED

LAMP INCLUDED:  
**8x GX53 LED**




### ROSA

2xE27

<b>2xE27</b>	4P2.000.G20.E28
<b>GX53 36W</b>	4000K 4P1.000.G20.E1L 3000K 4P1.000.G20.E1R
<b>2x28W 56W</b>	4000K 4P2.000.G20.C4L 3000K 4P2.000.G20.C4R
<b>2x40W 80W</b>	4000K 4P2.000.G20.D4L 3000K 4P2.000.G20.D4R

Fully adjustable position.



# VIVI/BEPPE 400

MODERN RANGE



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C  
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3300 lm)  
50W (5000 lm)



More details at page 59

### AVAILABLE COLORS

#### RESIN BODY (MOULDED COLOURS)

BLACK (A)

GREY (L)

WHITE (W)







#### DIFFUSER





CLEAR (X)

OPAL (Y)





VIVI/BEPPE 400 GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
	<b>6x7W 42W</b>	<b>4800Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	<b>VIVI-BEPPE 400</b> =  <b>70W</b> HIQ-SON
				3000K	
	<b>6x10W 60W</b>	<b>7200Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	<b>VIVI-BEPPE 400</b> =  <b>100W</b> HIQ-SON
				3000K	

VIVI/BEPPE 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
	<b>30W</b>	<b>3300Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	<b>VIVI-BEPPE 400</b> =  <b>50W</b> HIQ-SON
				3000K	
	<b>50W</b>	<b>5000Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	<b>VIVI-BEPPE 400</b> =  <b>70W</b> HIQ-SON
				3000K	


### GX53 LED

LAMP INCLUDED:  
**6x GX53 LED**



### VIVI 400

- 30W** 4000K V50.000.Q1L
- 3000K** V50.000.Q1R
- 50W** 4000K V50.000.H1L
- 3000K** V50.000.H1R
- 6x7W  
42W** 4000K V50.000.C6L
- 3000K** V50.000.C6R
- 6x10W  
60W** 4000K V50.000.D6L
- 3000K** V50.000.D6R



### HIGH POWER LED

LAMP INCLUDED  
**HIGH POWER LED E27**



**NEW**


### GX53 LED

LAMP INCLUDED:  
**6x GX53 LED**



### BEPPE 400

- 30W** 4000K P50.000.Q1L
- 3000K** P50.000.Q1R
- 50W** 4000K P50.000.H1L
- 3000K** P50.000.H1R
- 6x7W  
42W** 4000K P50.000.C6L
- 3000K** P50.000.C6R
- 6x10W  
60W** 4000K P50.000.D6L
- 3000K** P50.000.D6R



### HIGH POWER LED

LAMP INCLUDED  
**HIGH POWER LED E27**



**NEW**

# ECOVIVI/ECOBEPPE 400

## MODERN RANGE




MADE IN ITALY



### GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**  
long-life and efficient LED light sources
- **Built-in driver:**  
quick and easy lamp replacement
- **Great flexibility:**  
GX53 standard lamp holder
- **Future-proof luminaries:**  
performances easy to upgrade to latest technology developments





### AVAILABLE COLORS



RESIN BODY (MOULDED COLOURS)			DIFFUSER
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)







ECOVIVI/ECOBEPPE 400 42W GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE
	<b>6x7W 42W</b>	<b>4800Lm</b>	100-240V 50/60 Hz	4000K
				3000K
				ECOVIVI- ECOBEPPE 400  <b>70W</b>


ECOVIVI/ECOBEPPE 400 60W GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE
	<b>6x10W 60W</b>	<b>7200Lm</b>	100-240V 50/60 Hz	4000K
				3000K
				ECOVIVI- ECOBEPPE 400  <b>100W</b>

**GX53 LED** **E27** **ECOVIVI 400**

LAMP INCLUDED:  
**6x GX53 LED**



- E27** EV4.000.E27
- E40** EV4.000.E40
- 6x7W 42W** 4000K EV4.000.C6L  
3000K EV4.000.C6R
- 6x10W 60W** 4000K EV4.000.D6L  
3000K EV4.000.D6R

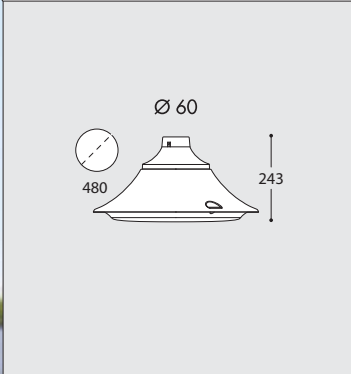


**E27 VERSION**  
SUITABLE FOR  
 **HQI - SON**


**GX53 LED** **E27** **ECOBEPPE 400**

LAMP INCLUDED:  
**6x GX53 LED**



- E27** EP5.000.E27
- E40** EP5.000.E40
- 6x7W 42W** 4000K EP5.000.C6L  
3000K EP5.000.C6R
- 6x10W 60W** 4000K EP5.000.D6L  
3000K EP5.000.D6R

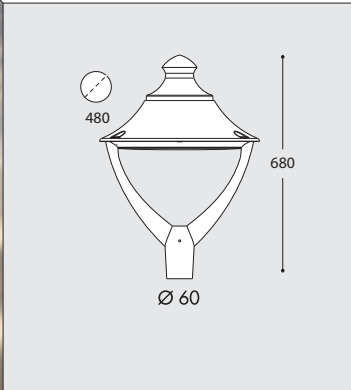

**E27 VERSION**  
SUITABLE FOR  
 **HQI - SON**

# GINO/REMO 400


MODERN RANGE



## GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**  
long-life and efficient LED light sources
- **Built-in driver:**  
quick and easy lamp replacement
- **Great flexibility:**  
GX53 standard lamp holder
- **Future-proof luminaries:**  
performances easy to upgrade to latest technology developments



### AVAILABLE COLORS

#### RESIN BODY (MOULDED COLOURS)

BLACK (A)

GREY (L)

WHITE (W)



#### DIFFUSER



CLEAR (X)



OPAL (Y)



DOUBLE INSULATION



GINO/REMO 400 42W GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
	<b>6x7W 42W</b>	<b>4800Lm</b>	100-240V 50/60 Hz	4000K	<b>GINO-REMO 400</b> =  <b>70W</b> HQI-SON
				3000K	

GINO/REMO 400 60W GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
	<b>6x10W 60W</b>	<b>7200Lm</b>	100-240V 50/60 Hz	4000K	<b>GINO-REMO 400</b> =  <b>100W</b> HQI-SON
				3000K	

### GX53 LED

LAMP INCLUDED:  
**6x GX53 LED**



### GINO 400

**E27**

**E27** F50.000.E27

**E40** F50.000.E40

**6x7W 4000K** F50.000.C6L


**42W 3000K** F50.000.C6R


**6x10W 4000K** F50.000.D6L

**60W 3000K** F50.000.D6R



**ALUMINIUM CHROME LOUVRE**  
.FC6



**E27 VERSION**  
SUITABLE FOR  
 **HQI - SON**

### GX53 LED

LAMP INCLUDED:  
**6x GX53 LED**



### REMO 400

**E27**

**E27** R50.000.E27

**E40** R50.000.E40

**6x7W 4000K** R50.000.C6L


**42W 3000K** R50.000.C6R

**6x10W 4000K** R50.000.D6L

**60W 3000K** R50.000.D6R



**ALUMINIUM CHROME LOUVRE**  
.FC6



**E27 VERSION**  
SUITABLE FOR  
 **HQI - SON**

# VIVI/BEPPE 500

MODERN RANGE



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C  
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT



**50W** (5000 lm)  
**60W** (7000 lm)

More details at page 59

## AVAILABLE COLORS

### RESIN BODY (MOULDED COLOURS)

BLACK (A)

GREY (L)


WHITE (W)



### DIFFUSER

CLEAR (X)

OPAL (Y)







VIVI/BEPPE 500 GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
 GX53 LED	<b>9x7W</b> <b>63W</b>	<b>7200Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	VIVI - BEPPE 500
				3000K	HQI-SON <b>100W</b>
 GX53 LED	<b>9x10W</b> <b>90W</b>	<b>10800Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	VIVI - BEPPE 500
				3000K	HQI-SON <b>150W</b>

VIVI/BEPPE 500 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
 E27 HIGH POWER LED	<b>50W</b>	<b>5000Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	VIVI-BEPPE 500
				3000K	HQI-SON <b>70W</b>
 E27 HIGH POWER LED	<b>60W</b>	<b>7000Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	VIVI-BEPPE 500
				3000K	HQI-SON <b>100W</b>


### GX53 LED

LAMP INCLUDED:  
**9x GX53 LED**



### VIVI 500

- 50W** 4000K V60.000.H1L
- 3000K** V60.000.H1R
- 60W** 4000K V60.000.W1L
- 3000K** V60.000.W1R
- 9x7W** 4000K V60.000.C9L
- 63W** 3000K V60.000.C9R
- 9x10W** 4000K V60.000.D9L
- 90W** 3000K V60.000.D9R



### E27

LAMP INCLUDED  
**HIGH POWER LED E27**



**NEW**


### GX53 LED

LAMP INCLUDED:  
**9x GX53 LED**



### BEPPE 500

- 50W** 4000K P60.000.H1L
- 3000K** P60.000.H1R
- 60W** 4000K P60.000.W1L
- 3000K** P60.000.W1R
- 9x7W** 4000K P60.000.C9L
- 63W** 3000K P60.000.C9R
- 9x10W** 4000K P60.000.D9L
- 90W** 3000K P60.000.D9R



### E27

LAMP INCLUDED  
**HIGH POWER LED E27**



**NEW**

# ECOVIVI/ECOBEPPE 500


MODERN RANGE



## GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**  
long-life and efficient LED light sources
- **Built-in driver:**  
quick and easy lamp replacement
- **Great flexibility:**  
GX53 standard lamp holder
- **Future-proofed luminaries:**  
performances easy to upgrade to latest technology developments



### AVAILABLE COLORS

#### RESIN BODY (MOULDED COLOURS)

BLACK (A)

GREY (L)

WHITE (W)



#### DIFFUSER

CLEAR (X)





ECOVIVI/ECOBEPPE 500 63W GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
	<b>9x7W 63W</b>	<b>7200Lm</b>	100-240V 50/60 Hz	4000K 3000K	ECOVIVI - ECOBEPPE 500 <b>100W</b>

ECOVIVI/ECOBEPPE 500 90W GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
	<b>9x10W 90W</b>	<b>10800Lm</b>	100-240V 50/60 Hz	4000K 3000K	ECOVIVI - ECOBEPPE 500 <b>150W</b>

### GX53 LED


LAMP INCLUDED:  
**9x GX53 LED**



### ECOVIVI 500

E27

- E27** EV6.000.E27
- E40** EV6.000.E40
- 9x7W 63W** 4000K EV6.000.C9L  
3000K EV6.000.C9R
- 9x10W 90W** 4000K EV6.000.D9L  
3000K EV6.000.D9R



E27 VERSION  
SUITABLE FOR  
 **HQI - SON**

### GX53 LED


LAMP INCLUDED:  
**9x GX53 LED**



### ECOBEPPE 500

E27

- E27** EP6.000.E27
- E40** EP6.000.E40
- 9x7W 63W** 4000K EP6.000.C9L  
3000K EP6.000.C9R
- 9x10W 90W** 4000K EP6.000.D9L  
3000K EP6.000.D9R



E27 VERSION  
SUITABLE FOR  
 **HQI - SON**

# GINO/REMO 500

MODERN RANGE




MADE IN ITALY



### GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**  
long-life and efficient LED light sources
- **Built-in driver:**  
quick and easy lamp replacement
- **Great flexibility:**  
GX53 standard lamp holder
- **Future-proof luminaries:**  
performances easy to upgrade to latest technology developments



AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)







GINO/REMO 500 63W GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE
	<b>9x7W 63W</b>	<b>7200Lm</b>	100-240V 50/60 Hz	4000K
				3000K
			GINO-REMO 500 HQI-SON 100W	

GINO/REMO 500 90W GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE
	<b>9x10W 90W</b>	<b>10800Lm</b>	100-240V 50/60 Hz	4000K
				3000K
			GINO-REMO 500 HQI-SON 150W	

### GX53 LED

LAMP INCLUDED:  
**9x GX53 LED**



### GINO 500


E27

**E27** F60.000.E27

**E40** F60.000.E40

**9x7W  
63W** 4000K F60.000.C9L  
3000K F60.000.C9R

**9x10W  
90W** 4000K F60.000.D9L  
3000K F60.000.D9R



ALUMINIUM  
CHROME  
LOUVRE  
.FC6



E27 VERSION  
SUITABLE FOR  
HQI - SON

### GX53 LED

LAMP INCLUDED:  
**9x GX53 LED**



### REMO 500


E27

**E27** R60.000.E27

**E40** R60.000.E40

**9x7W  
63W** 4000K R60.000.C9L  
3000K R60.000.C9R

**9x10W  
90W** 4000K R60.000.D9L  
3000K R60.000.D9R



ALUMINIUM  
CHROME  
LOUVRE  
.FC6



E27 VERSION  
SUITABLE FOR  
HQI - SON

# GLOBE 400/GLOBE 500

MODERN RANGE



MADE IN ITALY



## AVAILABLE COLORS

### RESIN BODY (MOULDED COLOURS)

BLACK (A)

GREY (L)

WHITE (W)



### DIFFUSER

CLEAR (X)

OPAL (Y)

SMOKED (Z)




## GLOBE 400



E27

G41.B40.E27

ALUMINIUM  
CHROME  
LOUVRE



E27 VERSION

SUITABLE FOR  
  
**HQI - SON**

## GLOBE 500




E27

G51.B50.E27

E40

G51.B50.E40

ALUMINIUM  
CHROME  
LOUVRE



E27 VERSION


SUITABLE FOR  
  
**HQI - SON**

# MODERN POLES




EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION


EKTOR 2500	
without door	000.361
with door	000.362
with door & box	000.363

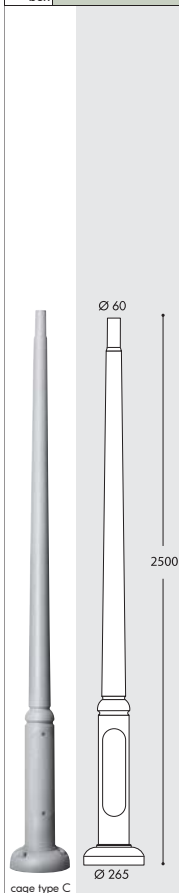


EKTOR 3000	AKILLE 3000	
without door	000.364	000.414
with door	000.365	000.415
with door & box	000.366	000.416

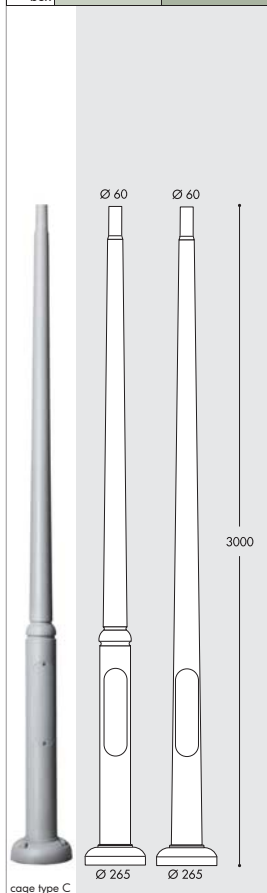


EKTOR 3500	AKILLE 3500	
without door	000.367	000.417
with door	000.368	000.418
with door & box	000.369	000.419

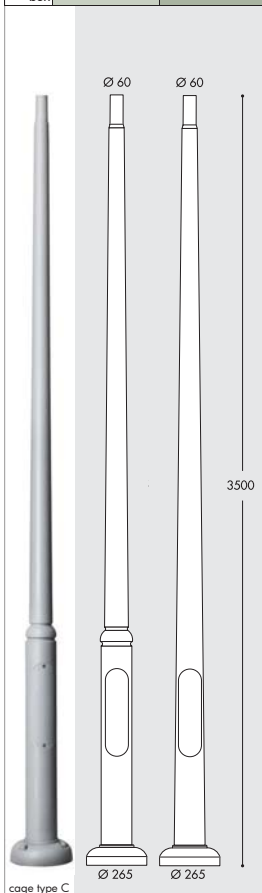

	EKTOR 4000	AKILLE 4000
without door	000.371	000.421
with door	000.372	000.422
with door & box	000.373	000.423

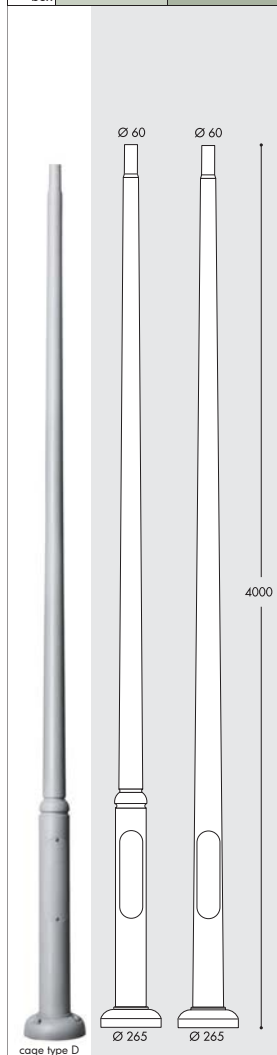








EKTOR 6000	
without door	000.384
with door	000.385
with door & box	000.386


	EKTOR 4500	AKILLE 4500
without door	000.374	000.424
with door	000.375	000.425
with door & box	000.376	000.426

	EKTOR 5000	AKILLE 5000
without door	000.377	000.427
with door	000.378	000.428
with door & box	000.379	000.429

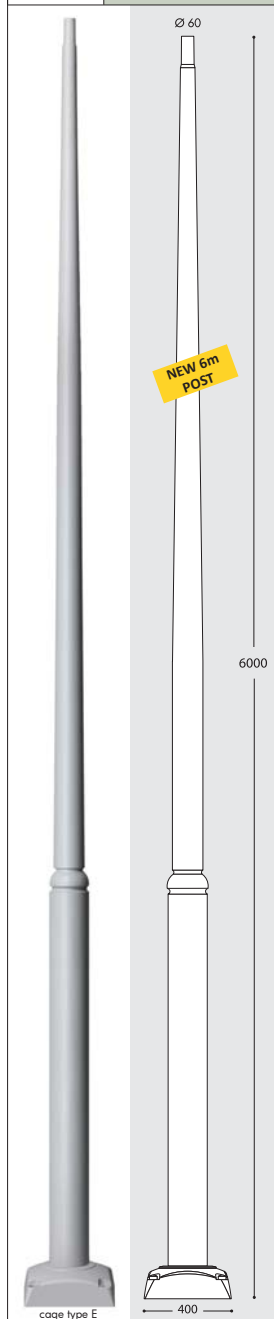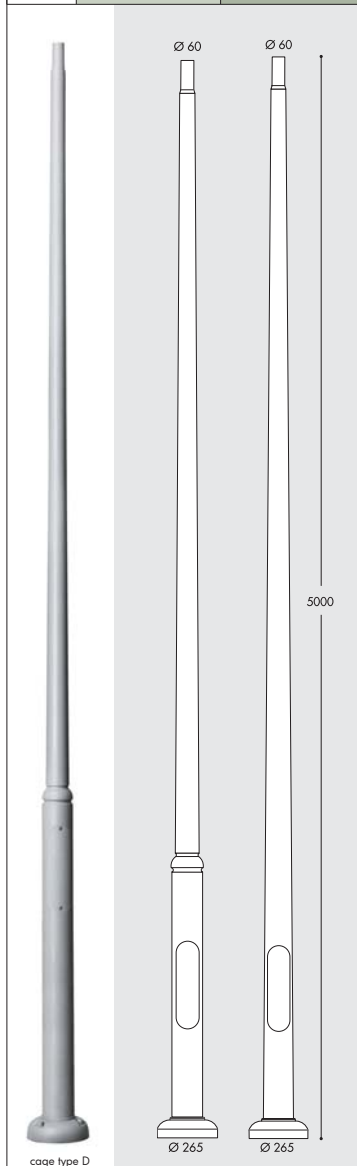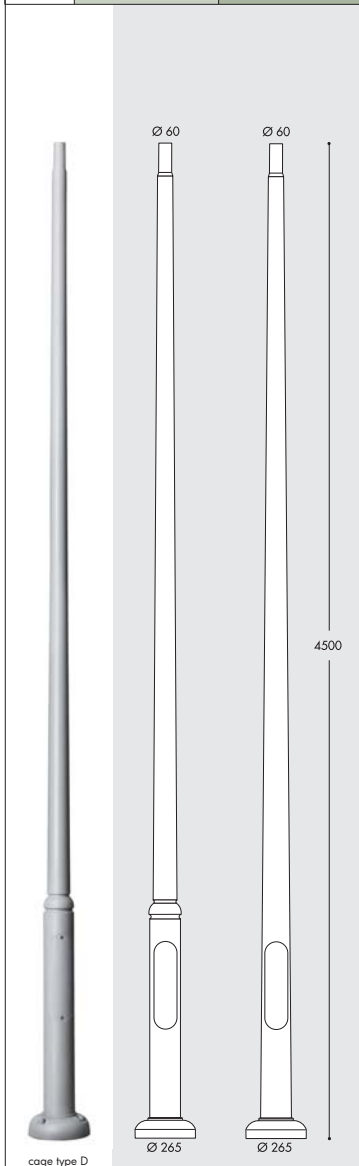

## MIDIPILAR WALL BRACKET


H.254.WAL



suitable for:  
GINO 400 - REMO400  
BEPPE 400 - ECOBEPPE 400  
VIVI 400 - ECOVIVI 400  
GLOBE 400

## MIDIPILAR SYSTEM 1L

000.000.A10




Ø60

suitable for:  
VIVI 400 - ECOVIVI 400  
GLOBE 400

## PILAR WALL BRACKET


H.253.WAL

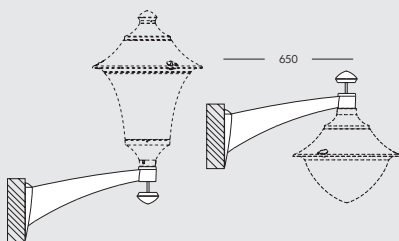

suitable for:  
GINO 500 - REMO 500  
VIVI 500 - ECOVIVI 500  
BEPPE 500 - GLOBE 500

## PILAR SYSTEM 1L

000.000.P10



Ø60

suitable for:  
VIVI 500 - ECOVIVI 500  
GLOBE 500


## NEW LOT BASE

Ø60




suitable for:  
GINO 400 - REMO400  
VIVI 400 - ECOVIVI 400  
BEPPE 400 - ECOBEPPE 400  
GLOBE 400 - GINO 500  
REMO500 - VIVI 500  
ECOVIVI 500 - GLOBE 500

H.115



## MIDIPILAR SYSTEM 2L

000.000.A20

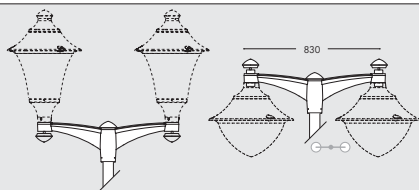


Ø60

suitable for:  
GINO 400 - REMO400  
VIVI 400 - ECOVIVI 400  
GLOBE 400

## MIDIPILAR SYSTEM 3L

000.000.A30

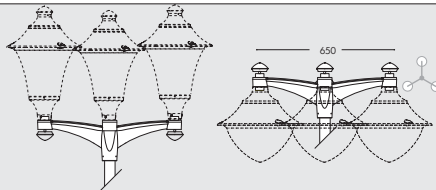


Ø60

suitable for:  
GINO 400 - REMO400  
VIVI 400 - ECOVIVI 400  
GLOBE 400

## PILAR SYSTEM 2L

000.000.P20



Ø60

suitable for:  
VIVI 500 - ECOVIVI 500  
BEPPE 500 - GLOBE 500

Ø 60mm

### FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

# LUIGI HIGH-BAY

MODERN RANGE



LUIGI 500



LUIGI 500



LUIGI 400 HP



LUIGI 400



**NEW VERSION  
HIGH POWER LED**



NEW HIGH POWER LED

**INDOOR &  
OUTDOOR  
USE**

+80°C  
-30°

90%  
HUMIDITY

VOLTAGE SURGE  
RESISTANT

**50W** (5000 lm)  
**60W** (7000 lm)

More details at page 59



**GX53 MODULAR LED LIGHT SYSTEM**



- **Cost saving:**  
long-life and efficient LED light sources
- **Built-in driver:**  
quick and easy lamp replacement
- **Great flexibility:**  
GX53 standard lamp holder
- **Future-proof luminaries:**  
performances easy to upgrade to latest technology developments

**AVAILABLE COLORS**

**RESIN BODY (MOULDED COLOURS)**

BLACK (A)

GREY (L)


WHITE (W)











**DIFFUSER**









CLEAR (X)

OPAL (Y)







HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 100	<b>30W</b>	<b>3300Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	 <b>50W</b>
				3000K	
E27 HIGH POWER LED  Ø 118	<b>50W</b>	<b>5000Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	 <b>500</b>
				3000K	 <b>70W</b>
E27 HIGH POWER LED  Ø 138	<b>60W</b>	<b>7000Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	 <b>100W</b>
				3000K	 <b>100W</b>

GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CLOUR TEMPERATURE	
	<b>6x7W</b> <b>42W</b>	<b>4800Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	 <b>70W</b>
				3000K	
	<b>6x10W</b> <b>60W</b>	<b>7200Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	 <b>100W</b>
				3000K	
	<b>9x7W</b> <b>63W</b>	<b>7200Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	 <b>100W</b>
				3000K	
	<b>9x10W</b> <b>90W</b>	<b>10800Lm</b>	<b>100-240V</b> 50/60 Hz	4000K	 <b>150W</b>
				3000K	


### LUIGI 500-DR HIGH POWER LED

 LAMP INCLUDED HIGH POWER LED E27

<b>50W LED</b>	4000K	L51.128.H1L
<b>3000K</b>	4000K	L51.128.H1R
<b>60W LED</b>	4000K	L51.128.W1L
<b>3000K</b>	4000K	L51.128.W1R




**NEW**


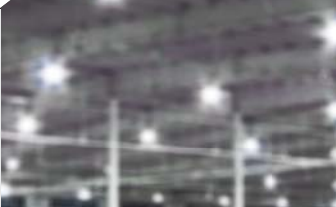



600  
680

### LUIGI 500 GX53 LED

 LAMP INCLUDED: GX53 LED


<b>9x7W</b>	4000K	L5F.128.C9L
<b>63W</b>	<b>3000K</b>	L5F.128.C9R
<b>9x10W</b>	4000K	L5F.128.D9L
<b>90W</b>	<b>3000K</b>	L5F.128.D9R





380  
600

### LUIGI 400-DR HIGH POWER LED

 LAMP INCLUDED HIGH POWER LED E27


<b>30W LED</b>	4000K	L41.128.Q1L
<b>3000K</b>	4000K	L41.128.Q1R
<b>50W LED</b>	4000K	L41.128.H1L
<b>3000K</b>	4000K	L41.128.H1R








480  
500

### LUIGI 400 GX53 LED

 LAMP INCLUDED: GX53 LED




<b>6x7W</b>	4000K	L4F.128.C6L
<b>42W</b>	<b>3000K</b>	L4F.128.C6R
<b>6x10W</b>	4000K	L4F.128.D6L
<b>60W</b>	<b>3000K</b>	L4F.128.D6R



330  
480

## G9 LED

		POWER	<b>NEW 1,7 W</b>	
		LUMINOUS FLUX	<b>170 lm</b>	
SIZE & SOCKET				
EFFICIENCY		100 lm/W		
VOLTAGE		100-240 V		
FREQUENCY		50/60 Hz		
CURRENT		17 mA		
COLOR RENDERING INDEX RA		80		
BEAM ANGLE		110°		
WARM UP TIME		≤ 0,5"		
SWITCHING CYCLE		> 40.000		
LIFETIME		15.000 h		
KELVIN		4000 K	3000 K	
REF. CODE		H.LED.G09.4K		H.LED.G09.3K

**INDOOR & OUTDOOR USE**  
-30 +80 °C 90% HUMIDITY  
VOLTAGE SURGE RESISTANT

CE LVD tested  
TUV SUD EMC tested ERP 6000h  
IECEE CB SCHEME  
IECEE CB CERTIFICATE: SG PSB-LE-02130





## GU10 LED

		POWER	<b>3,5 W</b>	
		LUMINOUS FLUX	<b>400 lm</b>	
SIZE & SOCKET				
EFFICIENCY		114 lm/W		
VOLTAGE		100-240 V		
FREQUENCY		50/60 Hz		
CURRENT		70 mA		
COLOR RENDERING INDEX RA		> 80		
BEAM ANGLE		36°		
WARM UP TIME		≤ 0,5"		
SWITCHING CYCLE		> 25.000		
LIFETIME		25.000 h		
KELVIN		4000 K	3000 K	
REF. CODE		H.LED.GU10		H.LED.GU10.3K
COMPARISON		 <p>3,5W = 50W 400 lm halogen SAVE 92%</p>		





SILICONE PROTECTION DRIVER  
**INDOOR & OUTDOOR USE**  
-30 +80 °C 90% HUMIDITY  
VOLTAGE SURGE RESISTANT

CE LVD tested  
TUV SUD EMC tested ERP 6000h  
IECEE CB SCHEME  
IECEE CB CERTIFICATE: SG PSB-LE-01714

## R7s LED 78mm

<p><b>SILICONE PROTECTION</b></p>  <p><b>INDOOR &amp; OUTDOOR USE</b></p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p>	 <p>NEW</p> <p>Ø22mm</p>	 <p>ENERGY CLASS: A+</p>	POWER	<b>NEW</b> 4 W
			LUMINOUS FLUX	400 lm
<p>CE LVD tested</p> <p>TUV SUD EMC tested</p> <p>ERP 6000h</p>			SIZE & SOCKET	R7s 
			EFFICIENCY	100 Lm/W
			VOLTAGE	100-240 V
			FREQUENCY	50/60 Hz
			CURRENT	75 mA
			POWER FACTOR	> 0,5
			COLOR RENDERING INDEX RA	> 80
			BEAM ANGLE	360°
			WARM UP TIME	≤ 0,5"
			SWITCHING CYCLE	45.000
			LIFETIME	25.000 h
			KELVIN	4000 K 3000 K
			REF. CODE	H7.LED.R7S.4K H7.LED.R7S.3K


## R7s LED 118mm




<p><b>SILICONE PROTECTION</b></p>  <p><b>INDOOR &amp; OUTDOOR USE</b></p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p>	 <p>NEW</p> <p>Ø22mm</p>	 <p>ENERGY CLASS: A+</p>	POWER	<b>NEW</b> 8,5 W
			LUMINOUS FLUX	900 lm
<p>CE LVD tested</p> <p>TUV SUD EMC tested</p> <p>ERP 6000h</p>			SIZE & SOCKET	R7s 
			EFFICIENCY	106 Lm/W
			VOLTAGE	100-240 V
			FREQUENCY	50/60 Hz
			CURRENT	168 mA
			POWER FACTOR	> 0,5
			COLOR RENDERING INDEX RA	> 80
			BEAM ANGLE	360°
			WARM UP TIME	≤ 0,5"
			SWITCHING CYCLE	45.000
			LIFETIME	25.000 h
			KELVIN	4000 K 3000 K
			REF. CODE	H8.LED.R7S.4K H8.LED.R7S.3K

## R7s LED 189mm

<p><b>SILICONE PROTECTION</b></p>  <p><b>INDOOR &amp; OUTDOOR USE</b></p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p>	 <p>NEW</p> <p>Ø22mm</p>	 <p>ENERGY CLASS: A+</p>	POWER	<b>NEW</b> 11 W
			LUMINOUS FLUX	1200 lm
<p>CE LVD tested</p> <p>TUV SUD EMC tested</p> <p>ERP 6000h</p>			SIZE & SOCKET	R7s 
			EFFICIENCY	110 Lm/W
			VOLTAGE	100-240 V
			FREQUENCY	50/60 Hz
			CURRENT	170 mA
			POWER FACTOR	> 0,5
			COLOR RENDERING INDEX RA	> 80
			BEAM ANGLE	360°
			WARM UP TIME	≤ 0,5"
			SWITCHING CYCLE	45.000
			LIFETIME	25.000 h
			KELVIN	4000 K 3000 K
			REF. CODE	H9.LED.R7S.4K H9.LED.R7S.3K

## E27 LED FILAMENT A60



POWER	6 W	8 W		
LUMINOUS FLUX	800 lm	1000 lm		
SIZE & SOCKET				
EFFICIENCY	133 Lm/W	125 Lm/W		
VOLTAGE	100-240 V	100-240 V		
FREQUENCY	50/60 Hz	50/60 Hz		
CURRENT	60 mA	76 mA		
POWER FACTOR	> 0,7	> 0,7		
COLOR RENDERING INDEX RA	> 80	> 80		
BEAM ANGLE	360°	360°		
WARM UP TIME	≤ 0,5"	≤ 0,5"		
SWITCHING CYCLE	> 100.000	> 100.000		
LIFETIME	25.000 h	25.000 h		
KELVIN	4000K	2700 K	4000K	2700 K
REF. CODE	H.LED.FIL.4K	H.LED.FIL.3K	H2.LED.FIL.4K	H2.LED.FIL.3K
COMPARISON				


### SILICONE PROTECTION DRIVER



### INDOOR & OUTDOOR USE

-30 +80 °C | 90% HUMIDITY



VOLTAGE SURGE RESISTANT



IECEE CB CERTIFICATE:  
SG PSB-LE-01711

## E27 LED FILAMENT A70



POWER	12 W	
LUMINOUS FLUX	1500 lm	
SIZE & SOCKET		
EFFICIENCY	125 Lm/W	
VOLTAGE	100-240 V	
FREQUENCY	50/60 Hz	
CURRENT	100 mA	
POWER FACTOR	> 0,7	
COLOR RENDERING INDEX RA	> 80	
BEAM ANGLE	360°	
WARM UP TIME	≤ 0,5"	
SWITCHING CYCLE	> 100.000	
LIFETIME	25.000 h	
KELVIN	4000K	2700K
REF. CODE	H3.LED.FIL.4K	H3.LED.FIL.3K
COMPARISON		


### SILICONE PROTECTION DRIVER



### INDOOR & OUTDOOR USE

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT



IECEE CB CERTIFICATE:  
SG PSB-LE-01711

## E27 HIGH POWER LED



**NEW**



POWER	15 W	30 W		
LUMINOUS FLUX	1500 lm	3300 lm		
SIZE & SOCKET				
EFFICIENCY	100 Lm/W	110 Lm/W		
VOLTAGE	100-240 V	100-240 V		
FREQUENCY	50/60 Hz	50/60 Hz		
CURRENT	130 mA	135 mA		
POWER FACTOR	> 0,5	> 0,9		
COLOR RENDERING INDEX RA	> 80	> 80		
BEAM ANGLE	200°	200°		
WARM UP TIME	< 0,5"	< 1"		
SWITCHING CYCLE	30.000	30.000		
LIFETIME	25.000 h	25.000 h		
KELVIN	4000 K	3000 K	4000 K	3000 K
REF. CODE	H3.LED.HIP.4K	H3.LED.HIP.3K	H2.LED.HIP.4K	H2.LED.HIP.3K
COMPARISON	15W 1500 Lm  =  SAVE 85%	100W incandescent	30W 3300 Lm = 50W HQI-SON  SAVE 40% 	



**INDOOR & OUTDOOR USE**

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT








IECEE CB CERTIFICATE:  
SG PSB-LE-01712  
SG PSB-LE-01708


## E27 HIGH POWER LED



**NEW**




POWER	50 W	60 W		
LUMINOUS FLUX	5000 lm	7000 lm		
SIZE & SOCKET				
EFFICIENCY	100 Lm/W	116 Lm/W		
VOLTAGE	100-240 V	100-240 V		
FREQUENCY	50/60 Hz	50/60 Hz		
CURRENT	210 mA	290 mA		
POWER FACTOR	> 0,9	> 0,9		
COLOR RENDERING INDEX RA	> 80	> 80		
BEAM ANGLE	200°	200°		
WARM UP TIME	< 1"	< 0,5"		
SWITCHING CYCLE	30.000	30.000		
LIFETIME	25.000 h	25.000 h		
KELVIN	4000 K	3000 K	4000 K	3000 K
REF. CODE	H.LED.HIP.4K	H.LED.HIP.3K	H4.LED.HIP.4K	H4.LED.HIP.3K
COMPARISON	50W 5000 Lm  =  SAVE 30%	70W HQI-SON	60W 7000 Lm = 100W HQI-SON  SAVE 40% 	



**INDOOR & OUTDOOR USE**

-30 +80 °C | 90% HUMIDITY









VOLTAGE SURGE RESISTANT











IECEE CB CERTIFICATE:  
SG PSB-LE-01707  
SG PSB-LE-01705









## GX53 LED Ø75

		POWER	<b>3 W</b>	
		LUMINOUS FLUX	<b>350 lm</b>	
		SIZE & SOCKET		
		EFFICIENCY	116 Lm/W	
		VOLTAGE	100-240 V	
		FREQUENCY	50/60 Hz	
		CURRENT	30 mA	
		COLOR RENDERING INDEX RA	> 80	
		BEAM ANGLE	120°	
		WARM UP TIME	≤ 0,5"	
		SWITCHING CYCLE	> 30.000	
		LIFETIME	25.000 h	
		KELVIN	4000 K	3000 K
		REF. CODE	H.LED.G53	H.LED.G53.3K
COMPARISON				

## GX53 LED Ø100mm

		POWER	<b>7 W</b>	<b>10 W</b>
		LUMINOUS FLUX	<b>800 lm</b>	<b>1200 lm</b>
		SIZE & SOCKET		
		EFFICIENCY	114 Lm/W	120 Lm/W
		VOLTAGE	100-240 V	100-240 V
		FREQUENCY	50/60 Hz	50/60 Hz
		CURRENT	34 mA	48 mA
		POWER FACTOR	0,9	0,9
		COLOR RENDERING INDEX RA	> 80	> 80
		BEAM ANGLE	120°	120°
		WARM UP TIME	≤ 0,5"	≤ 0,5"
		SWITCHING CYCLE	> 30.000	> 30.000
LIFETIME	25.000 h	25.000 h		
		KELVIN	4000 K	3000 K
		REF. CODE	H2.LED.G53	H2.LED.G53.3K
COMPARISON				

## GX53 LED Ø180mm

		POWER	<b>7 W</b>		<b>11 W</b>		<b>18 W</b>			
		LUMINOUS FLUX	<b>600 lm</b>		<b>1300 lm</b>		<b>2000 lm</b>			
		SIZE & SOCKET								
		EFFICIENCY	86 Lm/W		118 Lm/W		111 Lm/W			
		VOLTAGE	100-240 V		100-240 V		100-240 V			
		FREQUENCY	50/60 Hz		50/60 Hz		50/60 Hz			
		CURRENT	60 mA		150 mA		200 mA			
		POWER FACTOR	0,5		0,9		0,9			
		CRI (RA)	> 80		> 80		> 80			
		BEAM ANGLE	90°		90°		90°			
WARM UP TIME	≤ 0,5"		≤ 0,5"		≤ 0,5"					
SWITCHING CYCLE	30.000		> 25.000		> 25.000					
LIFETIME	25.000 h		25.000 h		25.000 h					
KELVIN	4000 K   3000 K		4000 K   3000 K		4000 K   3000 K					
REF. CODE	H6.LED.G53.4K   H6.LED.G53.3K		H4.LED.G53   H4.LED.G53.3K		H5.LED.G53.4K   H5.LED.G53.3K					
COMPARISON	<b>7W = 60W</b>  <b>SAVE 88%</b>		<b>11W = 100W</b>  <b>SAVE 89%</b>		<b>18W = 150W</b>  <b>SAVE 88%</b>					

SILICONE PROTECTION

DRIVER



(11W-18W)

**INDOOR & OUTDOOR USE**

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT



LVD tested



EMC tested

ERP 6000h



IECEE CB CERTIFICATE:  
SG PSB-LE-01704  
SG PSB-LE-01713

TO SEE OUR COMPLETE COLLECTION

Ask for our  
**General Catalogue 2019**  
or visit our website at  
[www.fumagalli.it](http://www.fumagalli.it)



**137**  
DISTRIBUTORS  
ALL OVER THE WORLD

**MADE IN ITALY**

# RESIN MATERIAL ADVANTAGES



NO MAINTENANCE



ANTI-CORROSION



DOUBLE INSULATION



NOT AFFECTED BY CHEMICAL FERTILIZERS



UV-RAY STABILIZED



RECYCLABLE



UV TREATED



DOUBLE INSULATION



ANTI-SHOCK



TEMPERATURE



ENERGY SAVING



RESIDENTIAL



PUBLIC

## HOW TO READ THE CODE

**DIFFUSER**

IDENTIFIES THE DIFFUSER

**R50**

**STRUCTURE**

IDENTIFIES THE STRUCTURE ON WHICH THE DIFFUSER IS MOUNTED (POLE, BRACKET, BASE, SPIKE)

**361**

**SYSTEM**

IDENTIFIES THE MULTILIGHT SYSTEM IF PRESENT

**A20**

**COLOUR OF THE STRUCTURE**

IDENTIFIES THE COLOUR OF THE STRUCTURE

**A** BLACK  
**W** WHITE  
**L** GREY

**A**

**COLOUR OF THE DIFFUSER**

IDENTIFIES THE COLOUR OF THE DIFFUSER

**X** CLEAR/FROSTED  
**Y** OPAL  
**Z** SMOKED

**X**

**ELECTRIFICATION**

IDENTIFIES THE TYPE OF ELECTRIFICATION AND THE EVENTUAL PRESENCE OF BULBS

**E27**

**VARIANT**

IDENTIFIES THE PRESENCE OF COMPONENTS SUCH AS AN EVENTUAL LOUVER

**FC6**

MADE IN  
ITALY



Fumagalli S.r.l.  
Via Ca' Bassa, 29  
21100 Varese - ITALY  
Tel. +39.0332.336353  
Fax. +39.0332.336358  
E-mail [italian.lux@fumagalli.it](mailto:italian.lux@fumagalli.it)



[www.fumagalli.it](http://www.fumagalli.it)